

ABB i-bus® KNX  
Weather Sensor, SM  
WES/A 3.1, 2CDG120046R0011



#### Product description

The Weather Sensor WES/A 3.1 detects – primarily in the residential sector – wind speed, rain, brightness in three directions, twilight, temperature and the date and time using the GPS signal.

The WES/A 3.1 is matched to the Weather Unit from ABB.

An additional heating transformer is not required.

# ABB i-bus<sup>®</sup> KNX

## Weather Sensor, SM

### WES/A 3.1, 2CDG120046R0011

#### Technical data

<b>Supply</b>	Voltage	24 V DC $\pm$ 2 V
	Current	200 mA
	Power	0.38 W, when heating switched off 4.15 W, when heating switched on
<b>Connections</b>	Electrical supply	1 (0 V potential)
	Electrical supply	2 (24 V potential)
	Serial data communication	A (RS 485)
	Serial data communication	B (RS 485)
<b>Connection terminals</b>	RS 485	Bus connection terminal, 2x (yellow/white) 0.8 mm $\varnothing$ , single core
	Supply	Terminal, 2-pin, screwless Wire end diameter 0.4...1.5 mm <sup>2</sup>
<b>Cable length</b>	Between the Weather Unit and Weather Sensor	100 m
<b>Cable length / cable cross-section</b>	P-YCYM or J-Y(ST)Y	2 x 2 x 0.8
<b>Temperature range</b>	Power	-25 °C...+60 °C
	Transport	-25 °C...+70 °C
	Storage	-25 °C...+60 °C
<b>Ambient conditions</b>	Atmospheric pressure	Atmosphere up to 2,000 m
<b>Mounting</b>	Wall fastening	
<b>Installation position</b>	Horizontal	
<b>Dimensions</b>	L x W x H	227 x 121 x 108 mm
<b>Housing/color</b>	Plastic, transparent	
	2 cable entries	
<b>Protection type</b>	IP 44	To DIN EN 60 529
<b>Protection class</b>	III	To DIN EN 61 140
<b>Isolation category</b>	Overvoltage category	III to EN 60 664-1
	Pollution degree	3 to DIN EN 60 664-1
<b>Fire classification</b>		V-2
<b>CE mark</b>	In accordance with the EMC guideline and low voltage guideline	

# ABB i-bus® KNX

## Weather Sensor, SM

### WES/A 3.1, 2CDG120046R0011

<b>Sensors</b>	3 x brightness sensors (center, left, right)	
	1 x wind sensor	
	1 x temperature sensor	
	1 x rain sensor	
	1 x GPS receiver	
<b>Brightness sensors / twilight</b>	Total measurement range (max. measurement range)	0... 100,000 Lux (130,000 Lux)
	Accuracy	± 25 %
	Measurement range	0...100 Lux
	Resolution	1 Lux
	Measurement range	100...10,000 Lux
	Resolution	10 Lux
	Measurement range	10,000...100,000 Lux
	Resolution	100 Lux
<b>Daylight</b>	Day => Night	Under 10 Lux is night
	Night => Day	Over 10 Lux is day
<b>Wind sensor</b>	Total measurement range (max. measurement range)	0...24 m/s (0...30 m/s)
	Accuracy	2.5...15 m/s ± 20 % 15...24 m/s ± 30 %
	Resolution	0.5 m/s
	Jump response	5 s at 5... 15 m/s
<b>Temperature sensor</b>	Total measurement range	-25...+60 °C
	Accuracy	At least ± 2 °C
	Resolution	0.1 °C
<b>Rain sensor</b>	Power consumption at 24 V	3.77 W, heating 100 % (max.) At 10 °C, no rain and a heating power of 3 W, the rain sensor will dry within 5 min. The heating power is adjusted automatically between 0 % (off) and 100 % (max.). The heating is switched on when the Weather Sensor is started.
	Function	Rain/no rain
<b>Radio receiver</b>	GPS	Date and time
	Acquisition mode:	
	Current / power	45 mA / 81 mW, at 1.8 V
	Tracking mode:	
	Current / power	35 mA / 63 mW, at 1.8 V
	Chipset	SIRFstarIV
Frequency	1575.42 MHz ± 1.023 MHz	
	Communication	Galileo satellites

# ABB i-bus® KNX

## Weather Sensor, SM

### WES/A 3.1, 2CDG120046R0011

#### Note

For a detailed description of the application see “*Weather Unit WZ/S 1.3.1.2, Weather Sensor WES/A 3.1*” product manual. It is available free-of-charge at [www.abb.com/knx](http://www.abb.com/knx).

ETS and the current version of the device application are required for programming.

The current version of the application is available on the Internet for download at [www.abb.com/knx](http://www.abb.com/knx). After import into ETS, it appears in the *Catalogs* window under *Manufacturers/ABB/Input/Weather Unit*.

The device does not support the locking function of a KNX device in ETS. If you use a *BCU code* to inhibit access to all the project devices, it has no effect on this device. Data can still be read and programmed.

#### Note

Facade control is not possible with the Weather Unit WZ/S 1.3.1.2. Please use the Weather Station WS/S for this. The WES/A sensor combined with the Weather Unit is suitable for small to medium-sized buildings. The facade structure, wind conditions and local influences should also be considered with these buildings.

#### Note

##### **Backward compatibility of the devices**


The MDRC devices and sensors are backward compatible and can be interchanged, although the following restrictions must be taken into account:

##### **For WES/A 3.1 in combination with the WZ/S 1.1:**



The Weather Unit does not detect that the wind sensor is faulty.

# ABB i-bus® KNX Weather Sensor, SM WES/A 3.1, 2CDG120046R0011

## Connection diagram

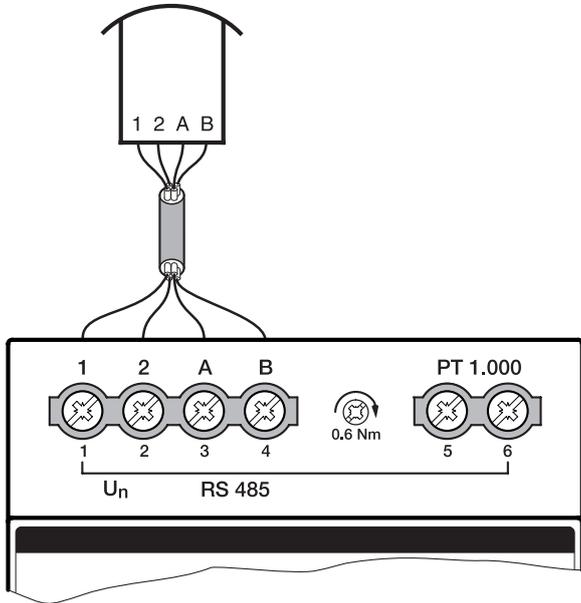

2CDC072029F0013

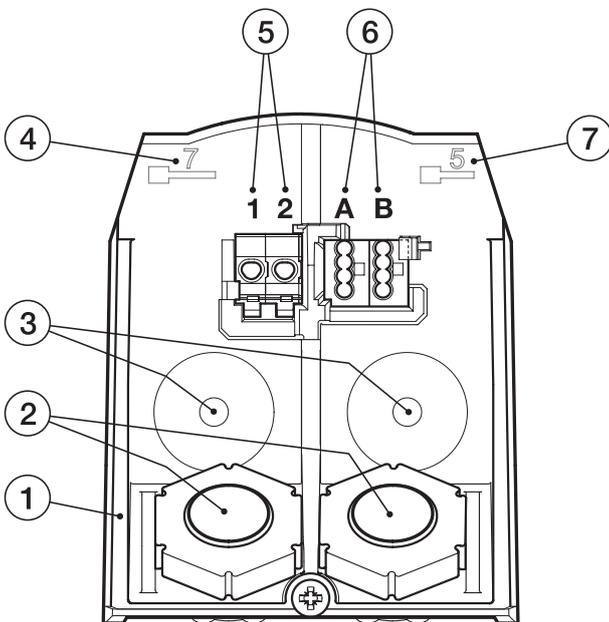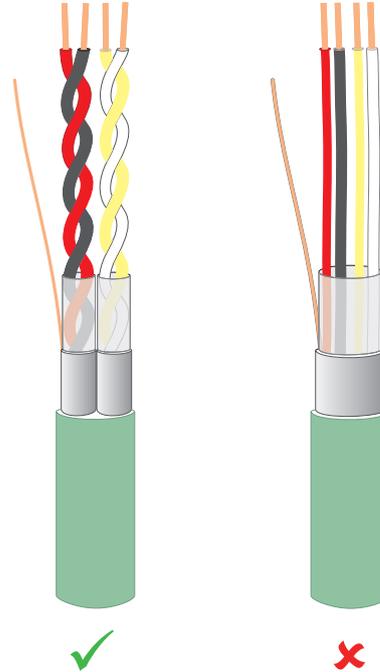


2CDC072028F0013

- 1 Wall socket
- 2 Cable entry
- 3 Fixing
- 4 Wire stripping length for left terminal
- 5 Electrical supply
- 6 Data communication
- 7 Wire stripping length for right terminal

# ABB i-bus® KNX Weather Sensor, SM WES/A 3.1, 2CDG120046R0011

## Arrangement of the sensors

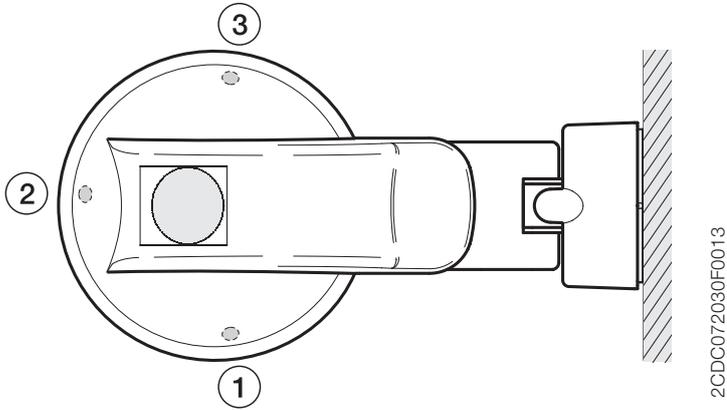

- 1 Brightness sensor left
- 2 Brightness sensor center
- 3 Brightness sensor right

## Dimension drawing

