




# C/NLH CiTiceL<sup>®</sup>

## Performance Characteristics

<b>Nominal Range</b>	0-2ppm
<b>Max Overload</b>	0-1000ppm
<b>Expected Operating Life</b>	See below
<b>Output Signal</b>	13-17mV in air across a 10Ω load resistor
<b>T<sub>95</sub> Response Time</b>	<20 secs
<b>Temperature Range</b>	-20°C to +50°C
<b>Temperature Coefficient</b>	0.2% signal/°C
<b>Pressure Range</b>	Atmospheric±10%
<b>Operating Humidity</b>	0 to 99% RH non-condensing
<b>Long Term Output Drift</b>	<5% signal loss /year
<b>Linearity</b>	Linear
<b>Purge Time (Ambient air to &lt;10ppm)</b>	<6hours
<b>Storage Life</b>	Six months in CTL container
<b>Recommended Storage Temp.</b>	0-20°C
<b>Warranty Period</b>	12 months from date of despatch

N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

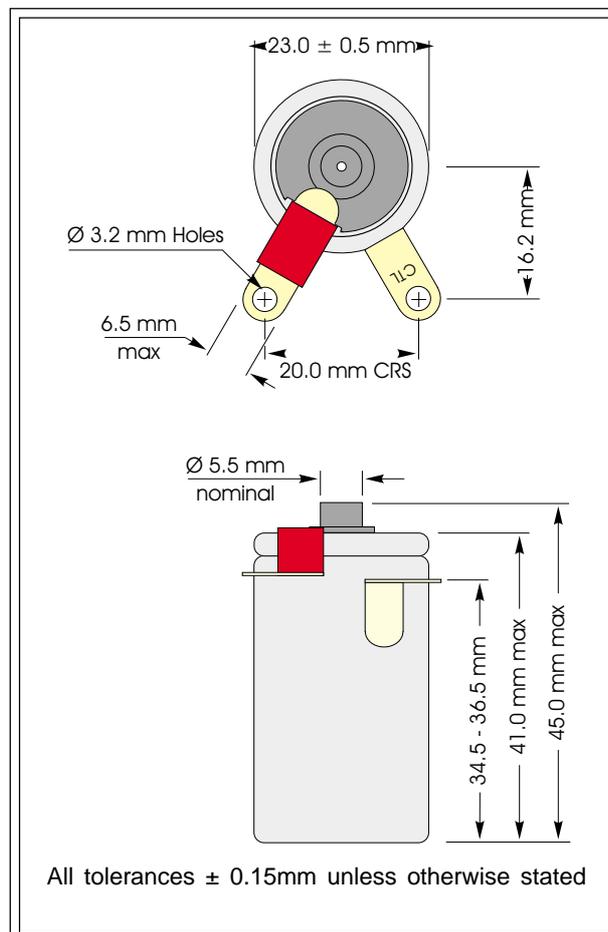

## Operating Life

The operating life of a C/NLL Oxygen CiTiceL is inversely proportional to the amount of oxygen the sensor consumes. As City Technology has no knowledge of the operating conditions of any particular application, the company cannot give any guarantee with regard to the life of the sensor. However the following guidelines should be of use:

Under normal operating conditions (i.e. ppm levels) the sensor has a large excess capacity, and there will only be a gradual loss of sensitivity. It is recommended, however, that the sensor is changed every year to maintain the optimum sensitivity.

It is not advisable to use these sensors in ambient air, or to keep them on load in air for long periods. This will considerably decrease the life of the sensor.

## Cross-interference

The C/NLH has been designed to have a **low hydrogen cross-interference**