



Emergency pull-wire switch

ZS 75 S 1Ö/1S VD

Material number: 1048339 (Material number old: 75130501)


Features/Options:

- Metal enclosure
- 2 contacts
- Wire length up to 2 x 100 m

Notes

- At 4 m distance intermediate wire supports are required. Two compensation springs type ZS 73/75 S must be installed, see accessories.

Dimensions

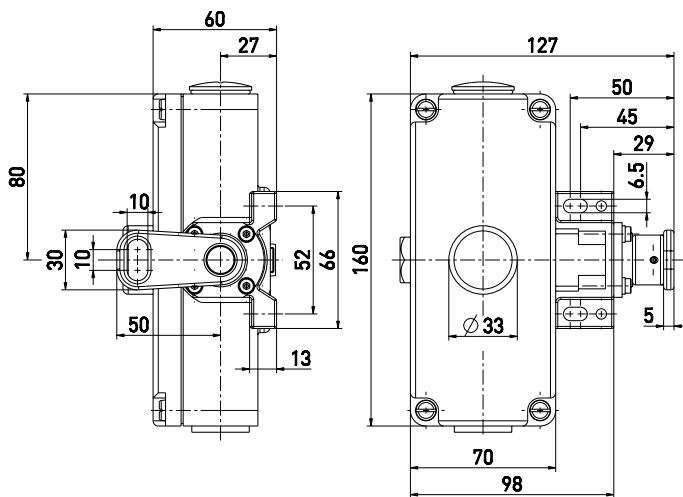

Technical data

Applied standards	EN 60947-5-1, EN 60947-5-5, EN ISO 13850, EN ISO 13849-1
Enclosure	aluminium die-cast, powder-coated
Cover	aluminium die-cast, powder-coated
Degree of protection	IP 65 to IEC/EN 60529
B _{10d} (10 % load)	100 000
T _M	max. 20 years
Contact material	silver
Switching elements	1 NC/1 NO contact, type Zb
Switching system	snap action, positive break NC contacts \ominus
Connection	screw connection terminals
Cable cross-section	min. 0.5 mm ² , max. 2.5 mm ² (incl. conductor ferrules)
Stripping length	6 mm
Cable entry	2 x M25 x 1.5
Rated impulse withstand voltage U _{imp}	6 kV
Rated insulation voltage U _i	400 V
Conventional thermal current I _{the}	6 A
Utilisation category	AC-15
Rated operating current/voltage I _e /U _e	6 A/400 VAC
Short-circuit protection	6 A gG/gN fuse
Ambient temperature	-25 °C ... +70 °C



Emergency pull-wire switch

ZS 75 S 1Ö/1S VD

Material number: 1048339 (Material number old: 75130501)

Technical data

Mechanical life > 100 000 operations


Max. wire length 2 x 100 m

Approvals




Weight 1100 g

Contact diagram



Switching diagram

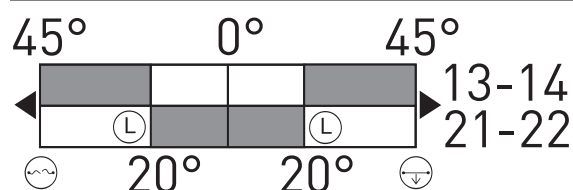

- ⌚ Latching point
- ⊖ Wire breakage detection
- ⬇ Wire pull detection