

CODE 497.3.230

135 mm (5,3") DIAMETER





HIGH SPEED - RADIAL

These blowers have small diameter and are appropriate for industrial/commercial floor care, where size of the blower is important. Blower's main advantage is very high performance/size ratio. Blower is supplied with separate controller. Main technical features are blocked rotor protection, thermal protection, soft start, over current protection, under/over voltage protection and speed control.

To start and/or control speed of the blower appropriate controller is needed. Please contact us for controller data (Part Nr.).

Applications:

- scrubbers,
- extractors,
- industrial vacuum cleaners,
- ATEX approved industrial vacuum cleaners,
- etc.

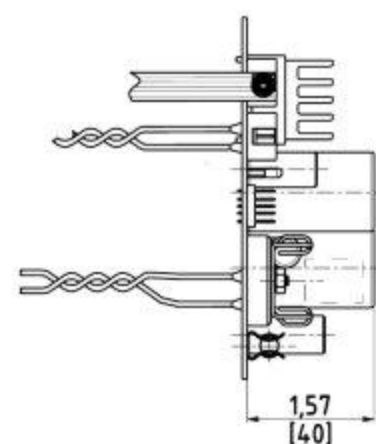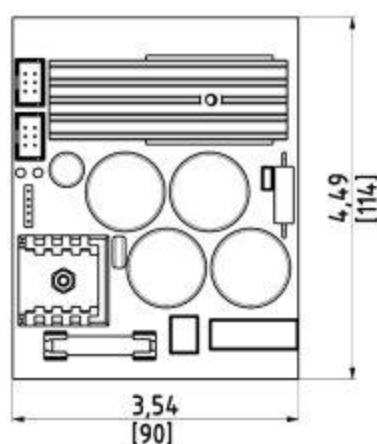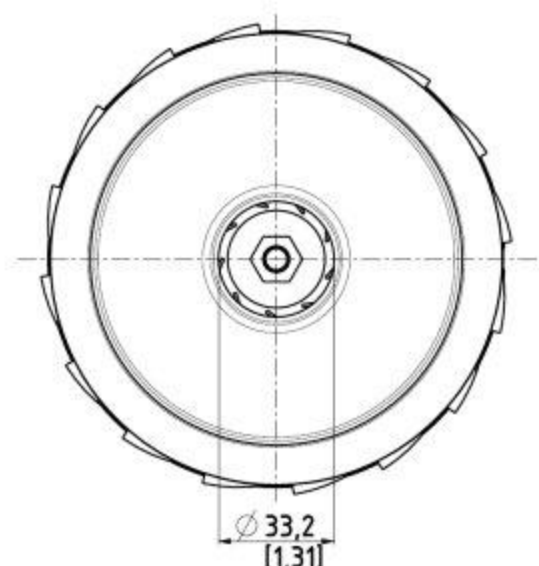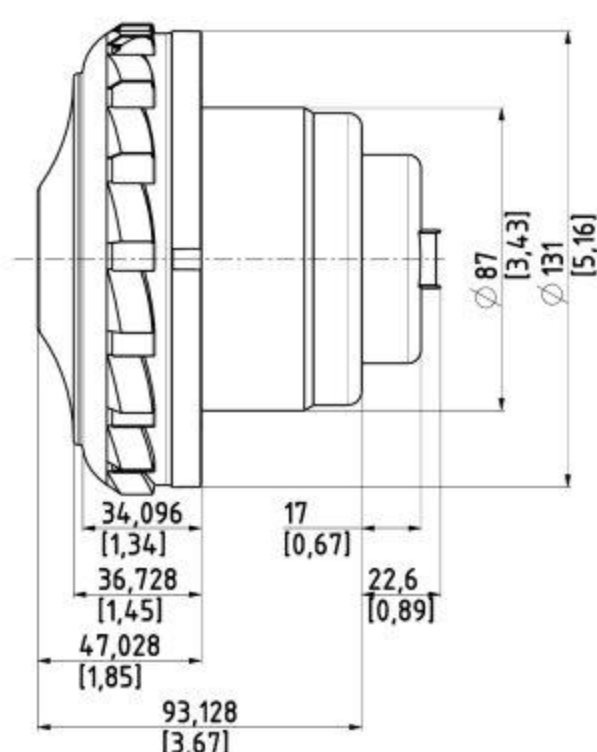

Dimensional and performance data are subject to change without notice.

Selection and ordering information for 230V or 120V/50Hz - RADIAL DISCHARGE							
Code	U	P1	Sealed Vacuum		Max. air flow		Mass
	[V]	[W]	[kPa]	[inH ₂ O]	[l/s]	[CFM]	[kg]
497.3.230	230	1100	23,4	94,0	64,7	137,1	1,2
497.3.230-2	120	1100	23,4	94,0	64,7	137,1	1,2

Data above represent the performance of an average motor sample. Individual data may vary due to normal manufacturing variations.

RADIAL DISCHARGE

230-240V AND 110-120V / 50-60Hz

