

PAVx

FOR C, D & G RELAYS
SERIES MODELS

CONNECTION: **FRONT**
TERMINAL TYPE: **SCREW**
MOUNTING: **PANEL / DIN RAIL**

OVERVIEW

- Cable secured with screws
- Mounting to panel and 35 mm DIN rail
- Sturdy construction
- No internal soldering
- Provision for fitment of keying pins
- Provision for fitment of retaining clip
- Snap-in relay (PAVC, PAVD models)
- Protection IP20

MODELS



PAVC081




PAVD161




PAVG161

PAVC081

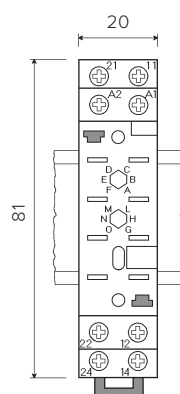


PAVD161

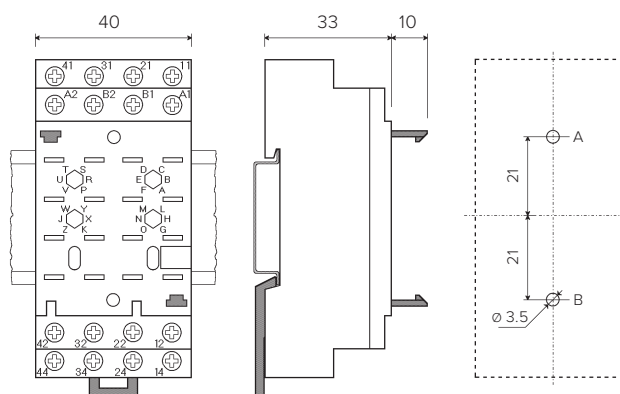

Holes for
panel
mounting

PAVG161

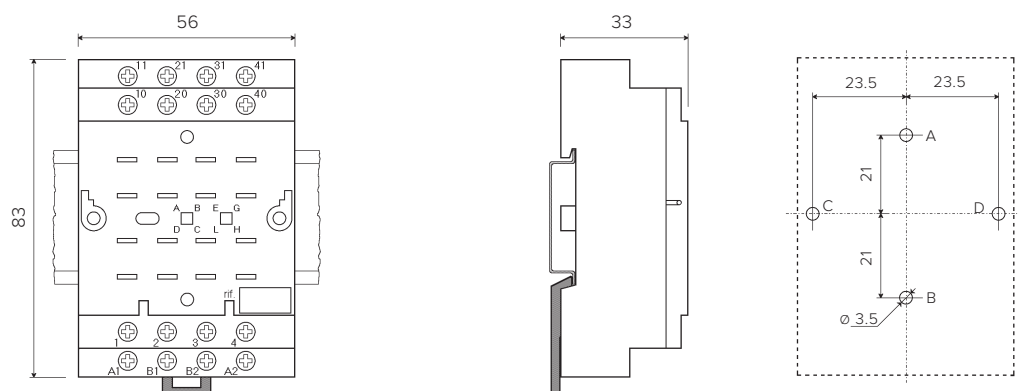

Holes for
panel
mounting

SPECIFICATIONS

Weight: 51 / 100 / 117 g

Operating temperature: -25°C...+55°C

Storage temperature: -40°C...+70°C

Panel mounting:

- \varnothing holes: 5.5 mm

Mounting to Omega support: H35 to DIN 46277/3
EN 60715 standards

Degree of protection: IP20

Dielectric strength: 2.5 kV 50 Hz for 1 min

Type and size of screw: M3 thread, cross head

Tightening torque: 0.5...0.8 Nm

Width of slot: 7.1 mm / 7.3 mm for PAVG161 model

Maximum section of cable: 2 x 2.5 mm²

Fire resistance: EN60695-2-1, UL94 - V0

Standards: EN60255, EN61810