

Einphasen / *Single phase*

Querstromventilator mit Kapillarkeilzunge

Crossflow fan with perforated guide vane

QK 08



Einphasen / Single phase

Leistungsdaten

Performance data

2-polig / 2 pole

4-polig / 4 pole

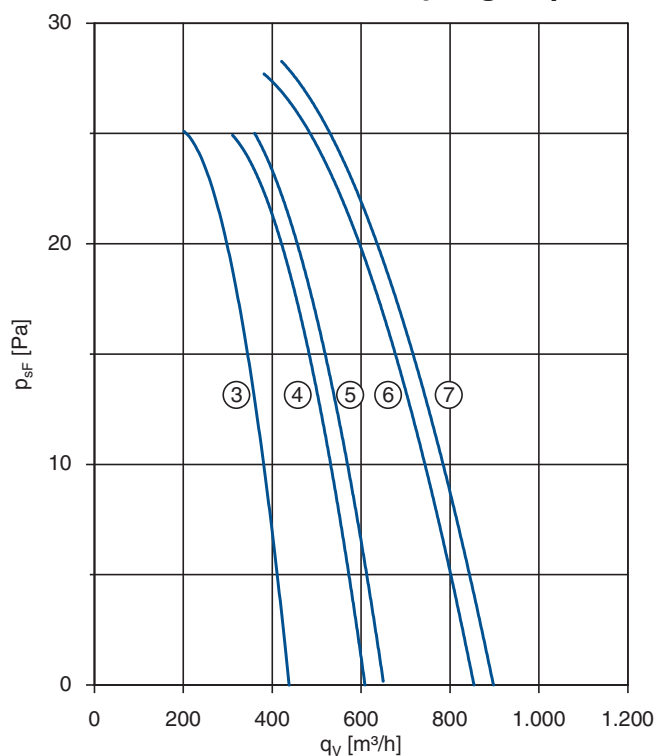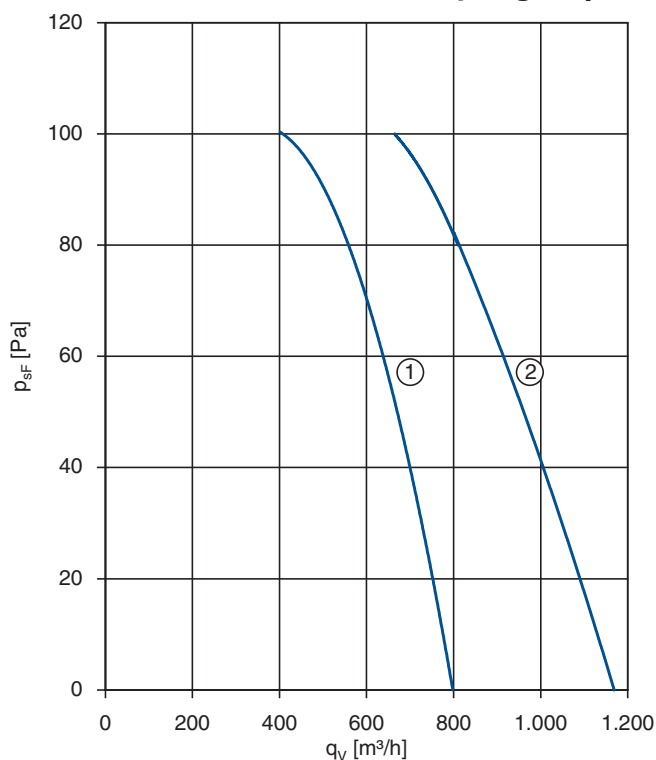

Ventilator-Typ Fan type	U V	f Hz	P ₁ W	I A	n min ⁻¹	C μF	q _v m³/h	L _{WA} dB(A)	R / P _R Ω / W	Min.pressung Min. pressure
QK08A-2EM.35.CF ①	230	50 60	180 220	0,8 1,0	2400 2450	4	800 820	70 71	nicht möglich not possible	
QK08A-2EM.50.CH ②	230	50 60	270 280	1,2 1,2	2470 2600	6	1180 1240	71 73	nicht möglich not possible	50 Pa
QK08A-4EM.35.CB ③	230	50 60	60 70	0,28 0,31	1330 1550	2	440 520	54 58	1200/40	
QK08A-4EM.50.CB ④	230	50 60	60 70	0,29 0,33	1300 1470	2	610 700	54 57	1200/40	
QK08A-4EM.50.CD ⑤	230	50 60	60 70	0,26 0,34	1380 1610	2	650 730	56 60	1200/40	
QK08A-4EM.70.CD ⑥	230	50 60	60 90	0,29 0,40	1340 1500	2	860 960	54 57	1200/40	
QK08A-4EM.70.CF ⑦	230	50 60	80 120	0,40 0,54	1410 1640	3	910 1030	55 60	750/40	