



VSDC-50

05.12.01 - X - Y - Z

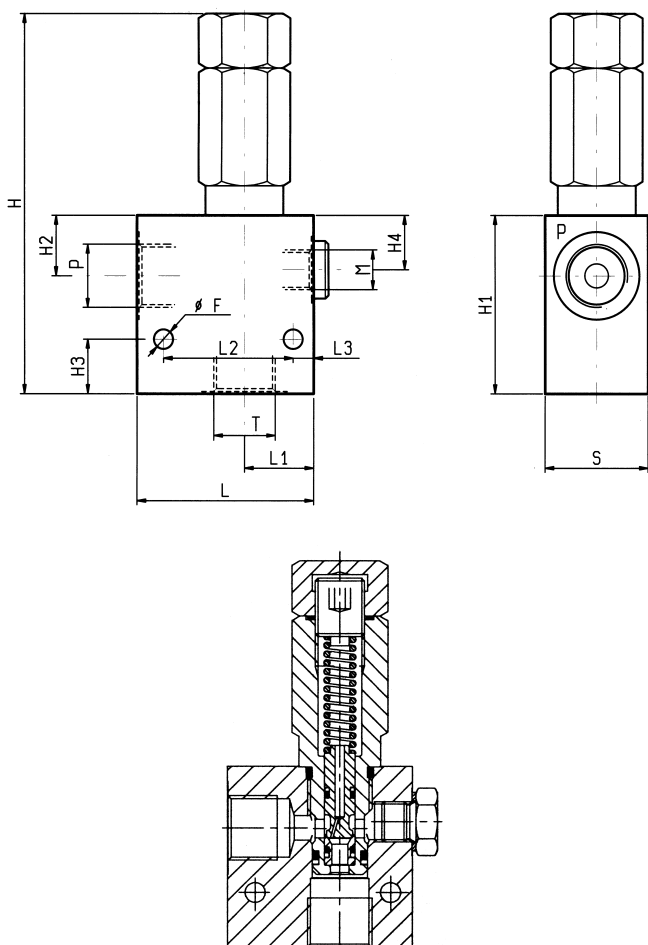

DATI TECNICI / TECHNICAL DATA

Pressione di lavoro max. 350 bar
 Max. working pressure

Portata massima vedi diagramma
 Flow see performance graph

35	8	44	30	60	18	18	20	59	126	6.5					1/2	0.62
35	7	44	23.5	60	20	8	20	49	116	6.5					3/8	0.58
S	L3	L2	L1	L	H4	H3	H2	H1	H	F					Y	Peso kg Weight kg



X

**REGOLAZIONI
ADJUSTMENTS**

03

vite esterna
 esagono incassato
 leakproof hex.
 socket screw



cappello per piombatura
 sealing cap
 codice / ordering code
 03.05.01.001



MOLLE / SPRINGS

Z	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (Q = 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
05	5-50	15	50	03.51.01.077	nero black
10	30-100	30	100	03.51.01.076	blu blue
20	60-210	60	200	03.51.01.075	verde green
35	100-350	100	350	03.51.01.059	giallo yellow

Y

ATTACCHI / PORT SIZE

P-T

M

02

G 3/8

G 1/4

03

G 1/2

G 1/4