

HF Resistant Laboratory pH Electrodes



Specifications

| | |
|------------------------------|------------------------------|
| Wetted Materials | Epoxy, pH glass, porous HDPE |
| Range of Measurements | 0-12 pH |
| Pressure Maximum | 50 Deg. C/100psig |
| Temperature Range | 0 - 50 Deg. C |
| Speed of Response | 95% in 5 seconds |
| Maximum Suggested HF% | 2% v/v |

Resist attack and etching from HF (up to 2% v/v)

Resist coating and fouling

Compatible with any pH meter

The specification sheet serves as an addendum to the pH LabSpecs sheet and covers all lab pH electrodes suitable for use in hydrofluoric acid.

Specifications differences for use in hydrofluoric acid (HF) are shown in SPECIFICATIONS section below. Please note 2 major differences as compared to standard electrodes. First, pH range is 0-12 not 0-14. Second, the temperature range is 0-50 deg C.

This series of electrodes are compatible with any lab or portable pH meter. Calibration of these electrodes is as normal with any standard pH electrode using standard pH buffer solutions.

Ordering Information


The HF models of these electrodes are available for our in-line, submersion and insertion (wet tap) models as follows:

Sensors


| | |
|------------------|---|
| S350CDHF | Epoxy body, 150mmL x 12mm OD, 30 in cable |
| S353CDHF | Flat surface KYNAR submersion pH electrode |
| S354CDHF | Flat surface CPVC submersion pH electrode with protective tip |
| S450CDHF | Flat surface CPVC side stream pH electrode |
| EXT Cable DIN-EL | Ext cable for models with DIN cap (S353CDHF, S354CDHF) |

HF Resistant Laboratory pH Electrodes


S350CDHF

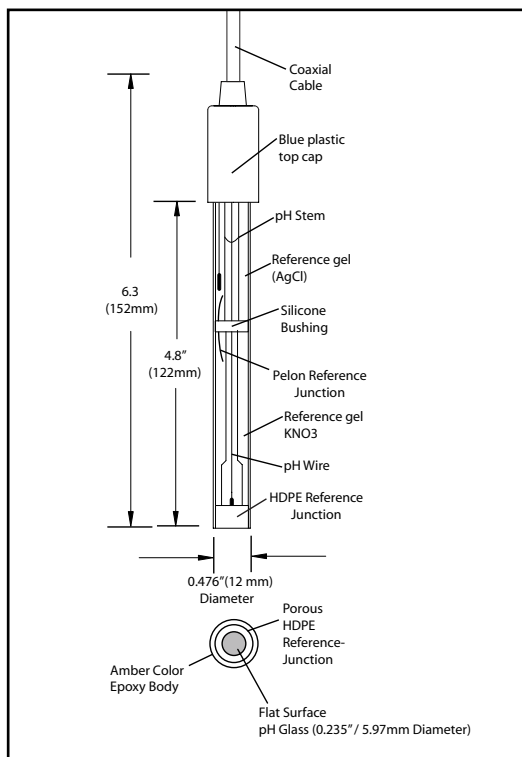

S450CDHF

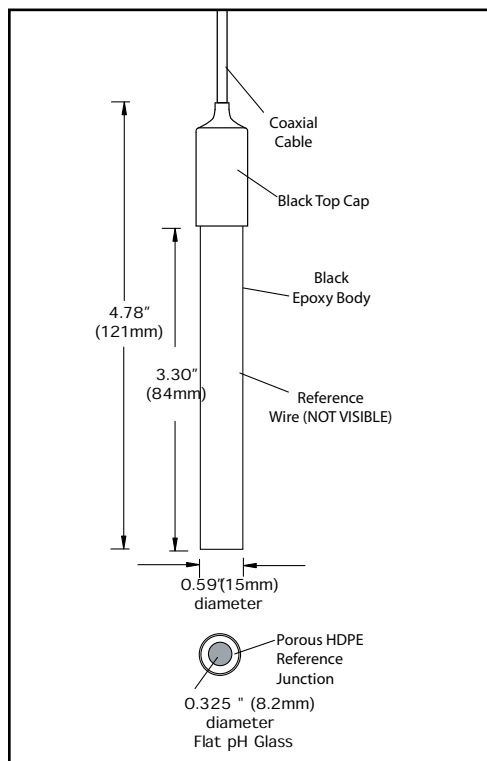

S354CDHF

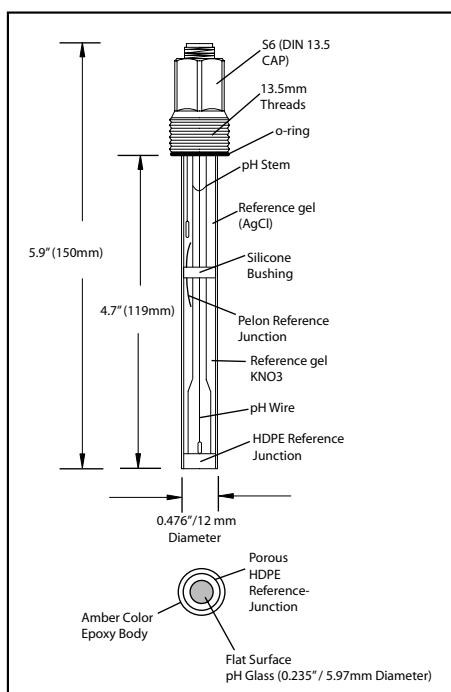

S353CDHF

