


RE 18320-01/01.10 <sup>1/2</sup>  
 Replaces: RE 00162-02/01.06

## Counterbalance, standard guided poppet type

Common cavity, Size 08

VBSN-08AA


04.52.20 - X - 56 - Z

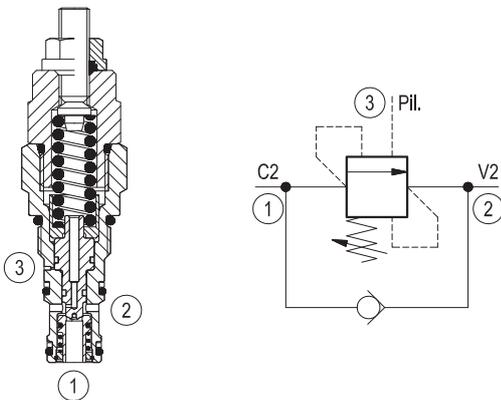

### Description

When pressure at 2 rises above the spring bias pressure, the check seat is pushed away from the piston and flow is allowed from 2 to 1. When load pressure at 1 rises above the pressure setting, the direct-acting, relief function is activated and flow is relieved from 1 to 2. With pilot pressure at 3, the pressure setting is reduced in proportion to the stated ratio of the valve, until fully open with free-flow from 1 to 2. The spring chamber is drained to 2, and any back-pressure at 2 is additive to the pressure setting in all functions.

### Performance

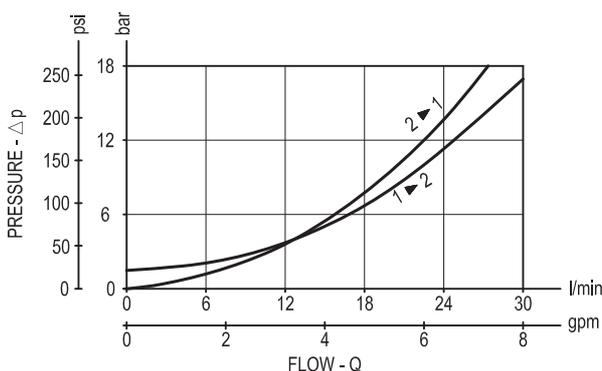

### Technical data

Max. operating pressure	bar (psi)	350 (5000)
Max. flow	l/min. (gpm)	30 (8)
Max. internal leakage (*)	drops/min.	15
Fluid temperature range	°C (°F)	-30 to 100 (-22 to 212)
Installation torque	Nm (ft-lbs)	34-41 (25-30)
Weight	kg (lbs)	0.18 (0.4)
Cavity		CA-08A-3C see data sheet RE 18325-70
Seal kit (**)	code material no.	RG08A9010520100 R901101592
Fluids		Mineral-based or synthetics with lubricating properties at viscosities of 10 to 500 mm <sup>2</sup> /s (cSt)
Filtration		Nominal value max. 10µm (NAS 8) ISO 4406 19/17/14
Installation		No restrictions
Other Technical Data		See data sheet RE 18350-50


Pressure setting: at least 1.3 times the load induced pressure.

(\*) At 70% of pressure setting

(\*\*) Only external seals for 10 valves

### Dimensions

**OPTION**  
 Tamper resistant cap  
 ordering code 11.04.23.002  
 Mat. no. R930000752

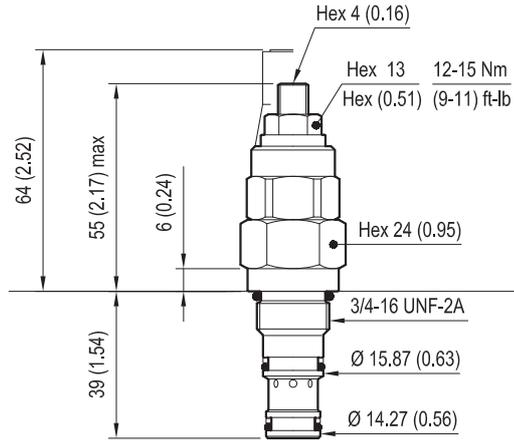

mm (Inches)

### Ordering code

04.52.20	X	56	Z	00	*
----------	---	----	---	----	---

Counterbalance,  
 standard guided poppet type

Pilot ratio

- = 03 4:1
- = 33 4:1 With sealed pilot (for Z=20 only)

Common cavity, Size 08

Series 0/A to L  
 unchanged performances and dimensions

Version and options standard

	SPRINGS		
	Adj. press. range bar (psi)	Pressure increase bar/turn (psi/turn)	Std. setting bar (psi) Q=5 l/min
= 15	70-150 (1000-2200)	72.5 (1051)	150 (2200)
= 20	100-210 (1450-3000)	109 (1581)	200 (2900)
= 35	200-350 (2900-5000)	137 (1987)	350 (5000)

**Note:** Special settings available. Contact factory authorized representative for ordering code

Type	Material number
045220035615000	R901161990
045220035620000	R901095960
045220035635000	R901095961
04522033562000A	R930006428

Type	Material number

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.  
 Subject to change.