


# DNG 2-2,5 WS



## Operating Data

Frequency	50	Hz
Speed	2760	1/min
Shaft Output	22	W
Volume Flow	79	m <sup>3</sup> /h
Pressure	$\Delta p_s$	204 Pa
	$\Delta p_t$	239 Pa
Density	1.2	kg/m <sup>3</sup>
Sound Pressure	63	dB(A)
ErP Compliance		


## Curves

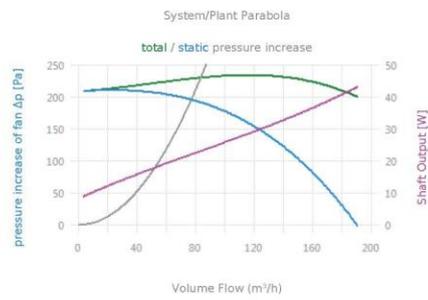

# DNG 2-2,5 WS



## Curves

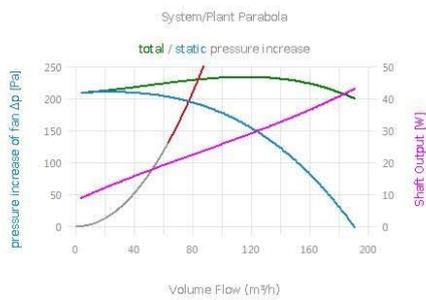


## Rated Data

Volume Flow	189	m³/h
Pressure Difference Pfa	211	Pa
Rated Power	0.05	kW
Rated Voltage	202-306/350-530	V
Rated Current	0.19/0.11	A
Speed	2760	1/min
Frequency	50	Hz
Protection Type	54	
Weight	ca. 2,8	kg
AC	-	
Three-Phase	+	
Universal Voltage	50Hz + 60Hz -	
Explosion Protection	-	
Adjustable Frequency	+	

# DNG 2-2,5 WS





## Curves

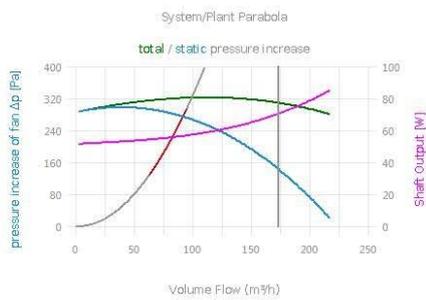

## Rated Data

Volume Flow	173	m <sup>3</sup> /h
Pressure Difference Pfa	293	Pa
Rated Power	0.07	kW
Rated Voltage	202-306/350-	V
	530	
Rated Current	0.16/0.09	A
Speed	3255	1/min
Frequency	60	Hz
Protection Type	54	
Weight	ca. 2,8	kg
AC	-	
Three-Phase	+	
Universal Voltage	50Hz -	
	60Hz +	
Explosion Protection	-	
	-	
Adjustable Frequency	+	

# DNG 2-2,5 WS

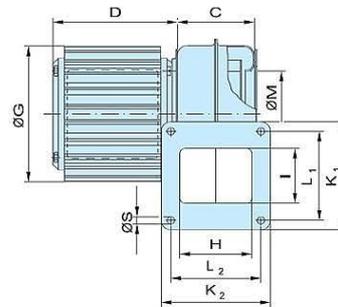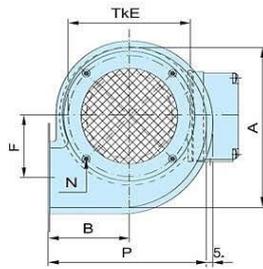

A	B	C	D	E	F	G	H	I	K1	K2	L1	L2	M	N	P	Q	R	S	T	T1	U	V1	V2	X
144	79	60	90	116	51	108	55,5	52	85	85	70	70	87	M3	148	0	0	5,8	0	0	0	0	0	0

Toleranzen gemäß DIN 24166 - Ventilatoren; Technische Lieferbedingungen  
 tolerances acc. DIN 24166 - Fans - technical delivery conditions

DNG 2-2,5 WS



### Your Requirement Profile

Drehrichtung  
Ausbläsrichtung  
Fussstellung  
Klemmkasten-Stellung

rechts  
links  
R90  
R0