

BATTERY CHARGER METERS


HOBUT

DESCRIPTION A range of ammeters and voltmeters with tough moving magnet or polarised moving iron movements designed for low cost indication of d.c or rectified a.c.

APPLICATION Domestic and automotive battery chargers and d.c power supplies.



F3PAM

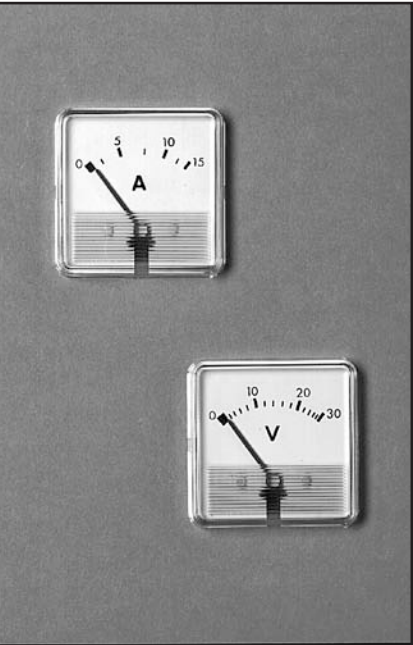

Standard Range: 0/2A, 0/4A, 0/5A, 0/6A, 0/8A, 0/10A, 0/12A, 0/15A, 0/20A, 0/25A, 0/30A, 0/15V, 0/30V

Calibration accuracy:	±8% of f.s.d.
Movement:	Polarised moving iron
Temperature range:	-20°C to +40°C
Terminations:	Flying leads as standard. Other terminations available on request
Fixing:	Snap into panel (or U clip type F3PM)
Options:	Black or white dial

Dimensions (mm)

