


PFG57I

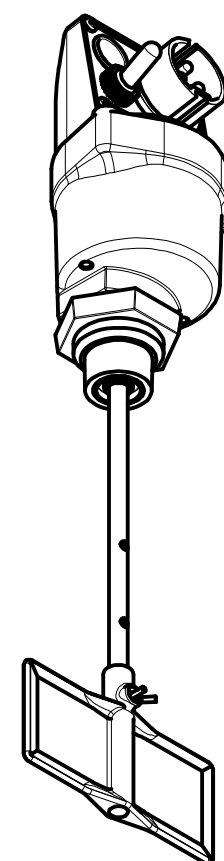

Model	PFG57I
Option	Delay timer on signal output +5 ... +10 [s] adjustable
Weight	1,3 [kg]
Power supply	42[V](50...60Hz) - 4[W]
Signal	SPDT / max. 5[A]-250VAC
IP grade	IP65
Housing	Aluminium (powder coated)
Connection	G 1 1/2 - Aluminium (counternuts & OR included)
Ambient temperature	-20 < Ta < +70 [°C]
Process temperature	-20 < Ta < +70 [°C]
MAX pressure	+3 [bar]
Directives	2011/65/EU (RoHS) 2014/30/EU (EMC)