


TECHNICAL DATA

Max working pressure:	350	bar
Max flow:	30	l/min
Pilot ratio:	10:1	
Installation torque:	41-49 Nm (max 90°)	
Weight:	0.6	Kg

WARNING: it is recommended to connect the air bleed port (G1/8) to tank.

The version with Z=01 in part no. (heavier spring) is generally recommended.

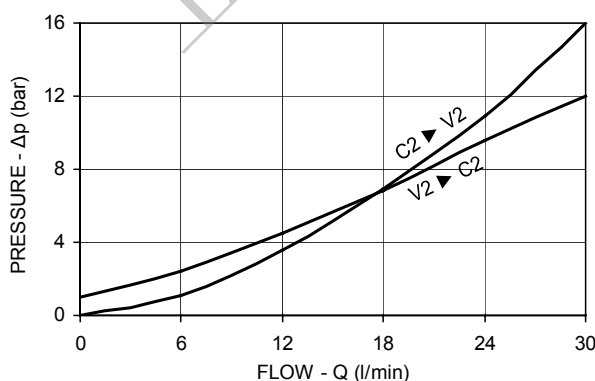

X O-RING ON PILOT PISTON

00 With O-Ring

SPRINGS

Z	SPRINGS			
	Cracking pressure bar		Ordering code	
00	1		03.51.01.317	
01	4.5		03.51.01.318	

PORT SIZE

Y	PORT SIZE	
	V2-C2	Pil
02	G 3/8	G 1/4