



# BAM4 screw end stops

## Common terminal block accessories




BAM4



10 mm 0.394 in spacing

### Mounting instructions

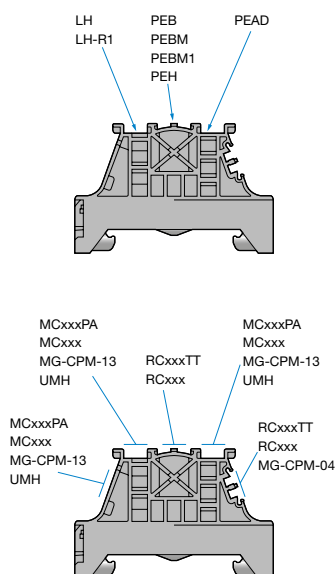

### Description

- Give efficient support to the SNK terminal blocks assemblies thanks to the BAM4 double gripping rail contact,
- Ease the assemblies identification with the BAM4 marking location compatible with all SNK markers and labels.

### Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
10 mm 0.394 in spacing	Dark grey	BAM4	1SNK90001R0000	50	14.00

### Main technical data

Material specifications	Insulating material	Polyamide		Rail	TH 35-7.5, TH 35-15
	Flammability	V0		Tool	Flat screwdriver Ø 5.5 mm Ø 0.217 in
	NF F 16 101	I2F2		Torque	1.3 N.m ± 0.1 11.4 lb.in ± 0.88
	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °C		
Ambient temperature min/max	Storage	-55 ... +110 °C	-67 ... +230 °C		
	Installing	-5 ... +40 °C	+23 ... +104 °C		

All the main technical data provided are "manufacturer" values

	RoHS				
	RoHS				

### Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Mounting rail		Symmetrical complying with IEC60715	TH35-7.5		
		Prepunched symmetrical	PR3.Z2	1	718.00
		Symmetrical complying with IEC60715	TH35-15		
		Prepunched symmetrical	PR30	2	328.00
		Symmetrical	TH35-7.5		
		Symmetrical	TH35-15		
Label holder		for end stop 33 x 10 mm 1.30 x 0.394 in	PR4	2	915.00
		for end stop 35 x 17 mm 1.378 x .669 in	PR50	2	1288.00
		for end stop 37 x 19.5 mm 1.456 x 0.768 in	PR3.G2	2	718.00
		for end stop 35 x 17 mm 1.378 x .669 in	PR5	2	700
		for end stop 29 x 9 mm 1.142 x 0.354 in			
		for end stop 40 x 5 mm 1.575 x 0.197 in			
		PEB with black marker and protection included			
		PEB with white marker and protection included			
		In polyamide 5 x 12 mm 0.197 x 0.472			
		In polyamide 6 x 12 mm 0.236 x 0.472 with AMS			
Blank marker		In polyamide 8 x 12 mm 0.315 x 0.472			
		In polyamide 5 x 10 mm 0.197 x 0.394			
		In polyamide 6 x 10 mm 0.236 x 0.394			
		In polyamide 6 x 10 mm 0.236 x 0.394			
		In polyamide 6 x 10 mm 0.236 x 0.394			
		In polyamide 6 x 10 mm 0.236 x 0.394			
		In polyamide 6 x 10 mm 0.236 x 0.394			
		In polyamide 4 x 10 mm 0.157 x 0.394			
		In polyamide 5 x 10 mm 0.197 x 0.394			
		In polyamide 6 x 10 mm 0.236 x 0.394			
		In polyamide 8 x 10 mm 0.315 x 0.394			
		In polyamide 10 x 10 mm 0.394 x 0.394			
		In polycarbonate 5 x 10 mm 0.197 x 0.394 compatible			
		In polycarbonate 5 x 10 mm 0.197 x 0.394 with HTP500			
		In polycarbonate 6 x 10 mm 0.236 x 0.394			
		In polycarbonate 6 x 10 mm 0.236 x 0.394			
		In polycarbonate 8 x 10 mm 0.315 x 0.394 compatible with			
		In polycarbonate 8 x 10 mm 0.315 x 0.394 HTP500 and MG3			
		In polycarbonate 5 x 12 mm 0.197 x 0.472 compatible			
		In polycarbonate 6 x 12 mm 0.236 x 0.472 with HTP500			
		In polycarbonate 6 x 12 mm 0.236 x 0.472			
		In polycarbonate 6 x 12 mm 0.236 x 0.472			
		In polycarbonate 8 x 12 mm 0.315 x 0.472			
		In polycarbonate 8 x 12 mm 0.315 x 0.472			
		In polycarbonate 5 x 12 mm 0.197 x 0.472 Compatible			
		In polycarbonate 6 x 12 mm 0.236 x 0.472 with MG3			
		In polycarbonate 5 x 12 mm 0.197 x 0.472			
		In polycarbonate 6 x 12 mm 0.236 x 0.472			
		In polycarbonate 5 x 10 mm 0.197 x 0.394			
		In polycarbonate 6 x 10 mm 0.236 x 0.394			
		In polycarbonate 6 x 10 mm 0.236 x 0.394			
		In polycarbonate 5 x 10 mm 0.197 x 0.394			
		Universal wire markers holder			
		5.2 mm 0.205 in spacing			

All the technical data for UL/CSA standard and dimensions in inches are in *italics*.

Technical data valid for copper conductors only.