

SUCTION STRAINERS

SS SERIES (STEEL)

SS Series (Steel) Suction Strainers offer a reliable, low-cost filtering of petroleum base hydraulic fluids, phosphate esters, water glycols, lubricating oils, coolants, fuels and water in fluid reservoirs, sumps and similar applications.

Standard Features:



- Cap assembly epoxy bonded to body for superior strength
- Re-usable
- Easily cleaned in non-caustic solvent
- Nominal filter rating of 140 microns

Standard Materials:

- Plated steel end cap
- Pleated 100 mesh stainless wire cloth
- Steel support tube

Ordering Information:

- To specify 3 PSI By-Pass option, add-RV3 to Part Number

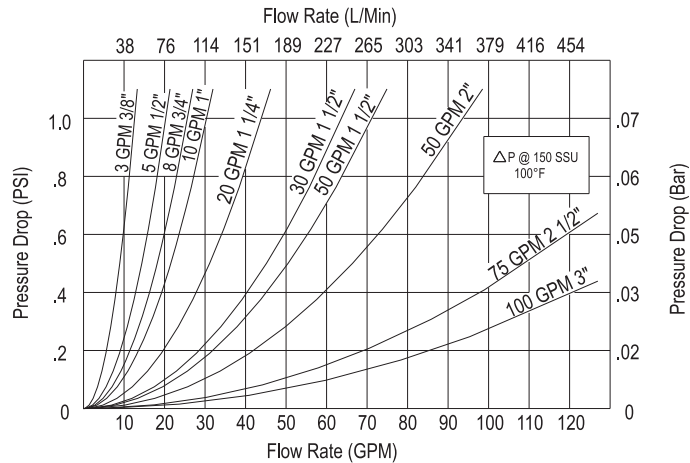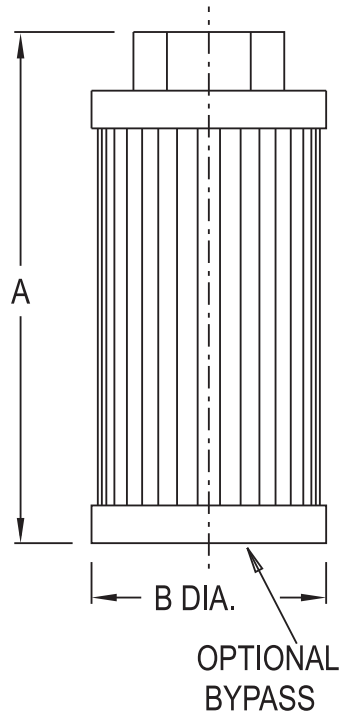

Series SS									
Part No.	Nominal Flow		Port NPT (inch)	Filter Area		Dimensions			
	GPM	L/min.		in	cm	A		B	
						in	mm	in	mm
SS3*	3	11	3/8	34	220	2.25	57	1.90	48
SS5	5	19	1/2	62	400	3.10	78	2.70	67
SS8	8	31	3/4	62	400	3.50	89	2.70	67
SS10	10	38	1	110	710	5.40	136	2.70	67
SS20	20	88	1 1/4	162	1050	6.90	174	3.40	86
SS30	30	120	1 1/2	225	1450	8.10	204	3.40	86
SS50	50	198	1 1/2	340	2190	10.00	225	4.00	100
SS51	50	198	2	340	2190	10.00	225	4.00	100
SS75	75	283	2 1/2	400	2580	10.10	257	5.20	130
SS100	100	379	3	500	3230	11.63	295	5.20	130

*By-Pass not available on this model