

External Hydrostatic Relief Valves

3125, 3127, 3129, SS8001, SS8002, SS8021 and SS8022 Series

Application

Designed especially for the protection of piping and shut-off valves where there is a possibility of trapping liquid LP-Gas or anhydrous ammonia. They may be installed in pipelines and hoses located between shut-off valves or in the side boss of RegO shut-off valves.




Features


- Relief valve designed to automatically reseal firmly after discharge.
- Resilient seat disc provides a "bubble-tight" seal.
- Available in both brass and stainless steel.
- Available in configurations that permit direct attachment of vent piping when required.

Materials

Body (3125, 3127, 3129)..... Brass
 Body (SS8001, SS8002, SS8021, SS8022)..... Stainless Steel
 Spring Stainless Steel
 Seat Disc Resilient Rubber



3129-10
Pipe Aw

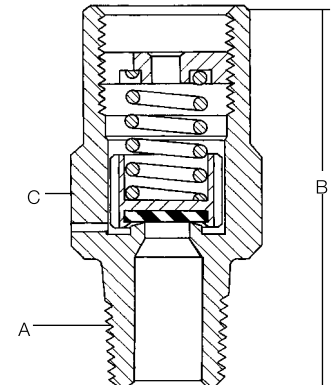

3125 Series (.161 Orifice)

3127 Series (.274 Orifice)


3129 Series (.386 Orifice)

Ordering Information


Part Number	Start To Discharge Setting PSIG	Valve Body Material	Container Connection M. NPT	Height (Approx.)	Wrench Hex Section	Accessories			
						Protective Cap	Pipeaway Adapter or Threads		
SS8001G	250	Stainless Steel	1/4"	7/8"	11/16"	-	-		
SS8002G			1/2"		7/8"				
SS8021G			1/4"		11/16"		1/4" NPSM Thrds		
SS8022G			1/2"		7/8"		3/8" NPT Thrds		
3127G	275	Brass	1/4"	1 31/32"	7/8"	9103-54	-		
3129G			1/2"	2 19/32"	1 1/8"	3129-40P	3129-10*		
3127H			1/4"	1 31/32"	7/8"	9103-54	-		
3129H			1/2"	2 19/32"	1 1/8"	3129-40P	3129-10*		
3127P	300	Brass	1/4"	1 31/32"	1 1/8"	9103-54	-		
3129P			1/2"	2 19/32"	1 1/8"	3129-40P	3129-10*		
SS8022P			Stainless Steel	1/2"	1 3/8"	7/8"	-	3/8" NPT Thrds	
3127J			350	Brass	1/4"	1 31/32"	7/8"	9103-54	-
3129J	1/2"	2 19/32"			1 1/8"	3129-40P	3129-10*		
SS8001J	Stainless Steel	1/4"		7/8"	11/16"	-	-		
SS8002J		1/2"			7/8"				
SS8021J		1/4"	1 3/8"		11/16"		1/4" NPSM Thrds		
SS8022J		1/2"	7/8"		3/8" NPT Thrds				
3127K	375	Brass	1/4"	1 31/32"	7/8"	9103-54	-		
3129K			1/2"	2 19/32"	1 1/8"	3129-40P	3129-10*		
3125L			400	Brass	1/4"	1 9/16"	5/8"	3125-40P	-
3127L					1 31/32"	7/8"	9103-54	-	
3129L	1/2"	2 19/32"			1 1/8"	3129-40P	3129-10*		
SS8001L	Stainless Steel	1/4"			7/8"	11/16"	-	-	
SS8002L		1/2"	7/8"						
SS8021L		1/4"	1 3/8"	11/16"		1/4" NPSM Thrds			
SS8022L		1/2"	7/8"	3/8" NPT Thrds					
3127U	450	Brass	1/4"	1 31/32"	7/8"	9103-54	-		
3129U			1/2"	2 19/32"	1 1/8"	3129-40P	3129-10*		
SS8001U			Stainless Steel	1/4"	7/8"	11/16"	-	-	
SS8002U				1/2"		7/8"			
SS8021U	1/4"	1"		11/16"		1/4" NPSM Thrds			
SS8022U	1/2"	7/8"		3/8" NPT Thrds					



SS8022G



SS8021, SS8022 Series (.156 Orifice)



SS8001, SS8002 Series (.156 Orifice)



* 1/2" F. NPT outlet connection.