

# Flow divider and combiner

## Common cavity, Size 10

DRFN-10A

04.05.01.00.85 - Z

**RE 18321-24**

Edition: 03.2016

Replaces: 09.2009



**Technical data**

Pressure min. - max.	10 - 350 bar (145 - 5000 psi)
Flow range	see "Range of total flow" table
Fluid temperature range	-30 to 100 °C (-22 to 212 °F)
Installation torque	41 - 47 Nm (30 - 35 ft-lbs)
Division ratio	50% - 50%
Weight	0.28 kg (0.62 lbs)
Cavity	CA-10A-4N (see data sheet 18325-70)
Lines bodies and standard assemblies	Please refer to section "Hydraulic integrated circuit" or consult factory
Seal kit <sup>1)</sup>	Code: RG10A4010530100 material no: R901111373
Fluids	Mineral-based or synthetics with lubricating properties at viscosities of 10 to 500 mm <sup>2</sup> /s (cSt)
Recommended degree of fluid contamination	Nominal value max. 10µm (NAS 8) / ISO 4406 19/17/14
Installation	No restrictions
Other Technical Data	See data sheet 18350-50


**Description**

Input flow at 3 will be divided and output equally to 2 and 4 independent of system pressures. Flow input at 2 and 4 will be combined and output at 3. Should either 2 or 4 become blocked in flow division mode, approximately 5% of the input flow will be transmitted to the open port.


1) Only external seals for 10 valves

Slippage (tolerance) from theoretical divided flows: ±5% to ±10%, depending from inlet flow (see diagram).

N.B. Slippage is lowest toward upper limit of nominal range.

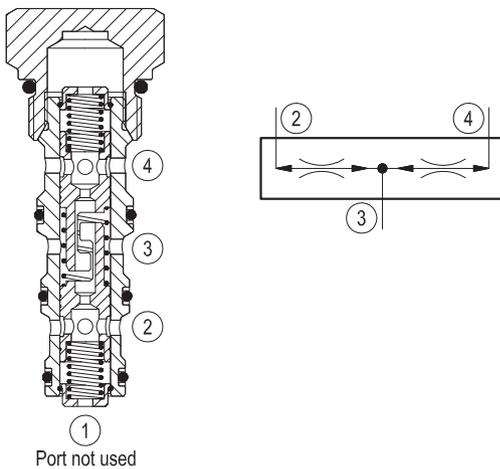

**Characteristic curve**

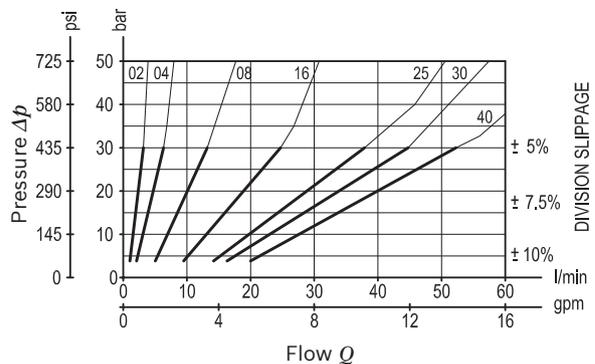

**Ordering code**

<b>04.05.01.00</b>	<b>85</b>	<b>Z</b>	<b>00</b>	<b>*</b>
--------------------	-----------	----------	-----------	----------

Flow divider and combiner

**85** Common cavity, Size 10

Series 0/A to L  
unchanged performances and dimensions

Version and options standard

	Regulated flow range l/min. (gpm)
<b>02</b>	1-3 (0.26-0.79)
<b>04</b>	2-6 (0.53-1.59)
<b>08</b>	5-13 (1.32-3.44)
<b>16</b>	9-24 (2.38-6.34)
<b>25</b>	14-37 (3.7-9.78)
<b>30</b>	16-44 (4.23-11.63)
<b>40</b>	20-54 (5.28-14.27)
<b>50</b>	25-60 (6.61-15.85)

**Preferred types**

Type	Material number
040501008502000	R901096072
040501008504000	R901096079
040501008508000	R901096080
040501008516000	R901096083

Type	Material number
040501008525000	R901096085
040501008530000	R901096086
040501008540000	R901096087
040501008550000	R930000091

**Dimensions**

