
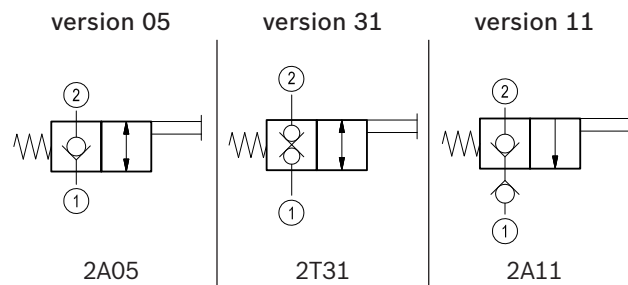


Directional control valves manual operated poppet 2-way normally closed Special cavity, 017-E

VMI-8A-2A-09-NC

OD.55 - X - 17.37 - Z

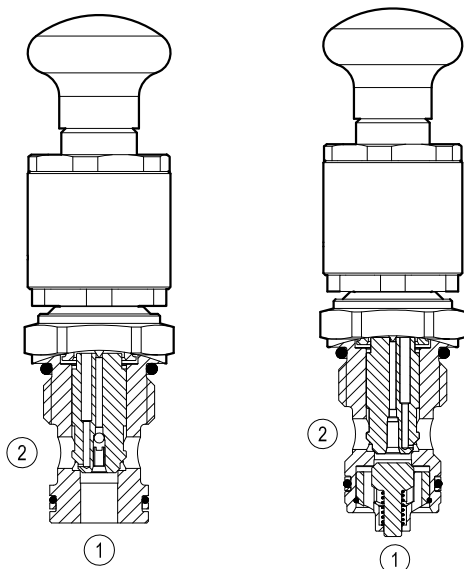

General

Weight	kg (lbs)	0.28 (0.62)
Installation orientation		Optional
Ambient temperature range	°C (°F)	-30 to 60 (-22 to 140)

Hydraulic

Max. operating pressure	bar (psi)	350 (5000)
Max. flow	l/min. (gpm)	70 (19)
Max. internal leakage	drops/min.	20
Fluid temperature range	°C (°F)	-20 to 80 (-4 to 176)

Fluids	Mineral-based or synthetics with lubricating properties at viscosities of 20 to 380 mm ² /s (cSt)	
Installation torque	Nm (ft-lbs)	54-66 (40-49)
Recommended degree of fluid contamination	Nominal value max. 25µm (NAS 8) ISO 4406 19/17/14	
Special cavity	017-E see RE 18325-75	
Lines bodies and standard assemblies	Please refer to section "Hydraulic integrated circuit" or consult factory	
Seal kit - version 05	code	RG17E201052010
	material no.	R934003562
Seal kit - version 31	code	RG17E201053010
	material no.	R934003563
Other technical data	See data sheet RE 18350-50	


Only for cam-operated valves:

Operating stroke	mm (in)	3 (0.12)
Max. overstroke	mm (in)	0.5 (0.02)


IMPORTANT: When valve is not operated, flow from 1 to 2 is not recommended due to high opening pressure.
(version 05)

Dimensions


Version 05: Directional control valves manual operated poppet 2-way normally closed - Special cavity

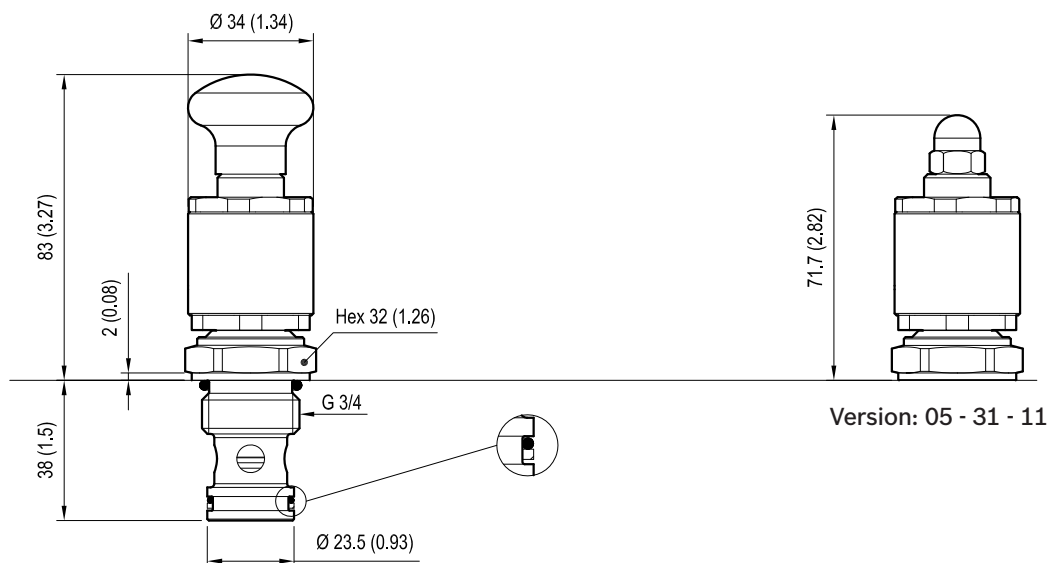

Version 31: Directional control valves manual operated poppet 2-way double lock normally closed - Special cavity

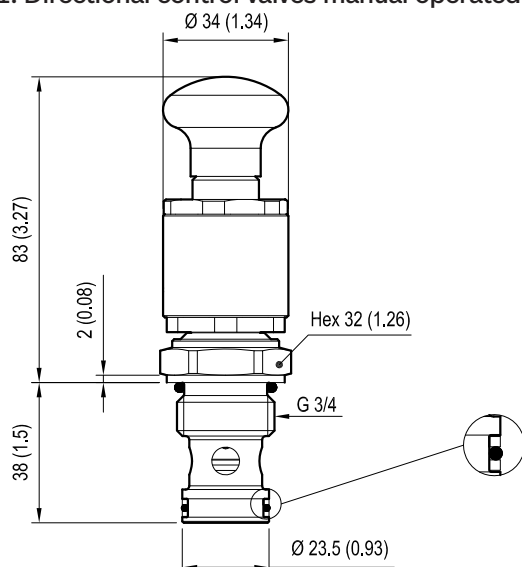


Version 11: Directional control valves manual operated poppet 2-way normally closed - Special cavity

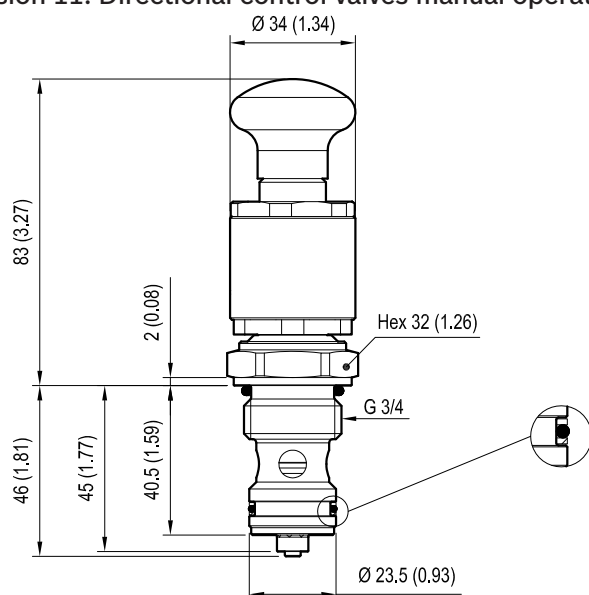


mm (Inches)

Performance graphs


Version 05

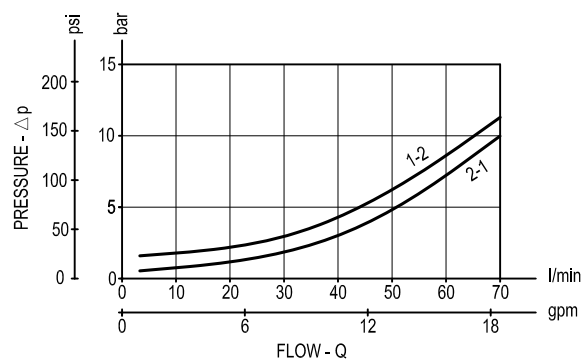


Version 31

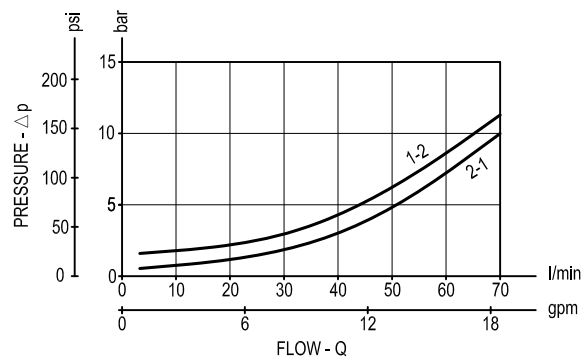






Version 05 - 31 - 11

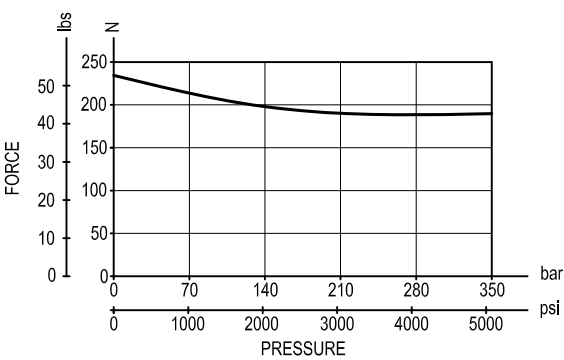

Version 11

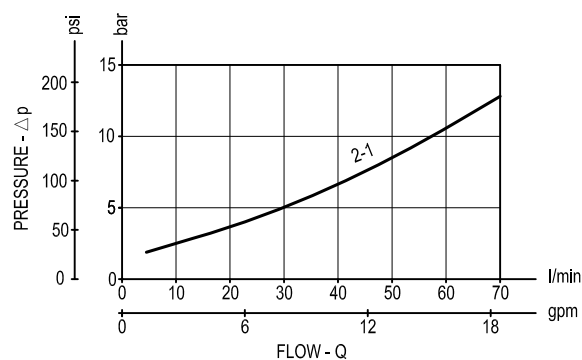

Ordering code

OD.55	X	17	37	Z
Directional control valves manual operated poppet 2-way normally closed				
 <p>= 05</p>			Hand-Operated 00 = 	
 <p>= 31</p>			Cam-Operated 01 = 	
 <p>= 11</p>				
Special cavity: 017-E				

Note: hand-operated version with detent available by request; please consult factory

Type	Material number	Type	Material number
OD550517370000	R934001424		
OD550517370100	R934001425		
OD553117370000	R934001437		
OD553117370100	R934001438		
OD551117370000	R934003846		
OD551117370100	R934003671		