



RJ45 AND USB 2.0 Contacts, Tools, and Accessories



Receptacle Metal Protective Cover for Mighty Mouse Series 804 connectors

Protect Connectors From Damage

Machined aluminum covers prevent ingress of contamination and water.

Stainless Steel Fittings and Rings


Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

Polyurethane-Coated SST Wire Rope offers high strength, excellent abrasion resistance and good flexibility. Or, choose Teflon® jacket for high temperature exposure.

Braided Nylon Rope provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

How To Order								
Sample Part Number		667-202	M	8	H	6	-14	R
Series (See Table I)	667-202 = Receptacle Cover (see note 1)							
Shell Material / Finish	M = Aluminum/Electroless Nickel RoHS Compliant NF = Aluminum/Cadmium with Olive Drab Chromate ZNU = Aluminum/Zinc-Nickel with Black Chromate MT = Aluminum/Nickel-PTFE RoHS Compliant Z1 = Stainless Steel/Passivated RoHS Compliant							
Shell Size	8, 10, 14, 15, 16							
Attachment Type	D = Bead Chain, CRES, Passivate G = Nylon Rope N = No Attachment S = SST Sash Chain T = SST Wire Rope, No Jacket "SST" = Stainless Steel F = Wire Rope, Nylon Jacket H = SST Wire Rope, Teflon® Jacket R = Wire Rope, PVC Jacket SK = Nylon Rope With Slip Knot U = SST Wire Rope, Polyurethane Jacket							
Attachment Length (inches)	Omit for attachment Type N (No Attachment) Example: "-6" equals six inch length							
Attachment Code (See Table II)	Small Ring = 01 thru 06 Large Ring = 28 thru 30							
Pull Ring Option	R = Supplied with Pull Ring (Omit for none)							

Table I: Cover Style



667-202

Push Pull Receptacle Cover with Pull Ring

NOTES

1. For plug covers contact factory
2. Material and Finish
 - Cover: Aluminum alloy or stainless steel
 - Hardware: Stainless steel, passivate





RJ45 AND USB 2.0 Contacts, Tools, and Accessories



Receptacle Metal Protective Cover for Mighty Mouse Series 804 Connectors



667-202 Cover Attachment to RPM Jam Nut Receptacle

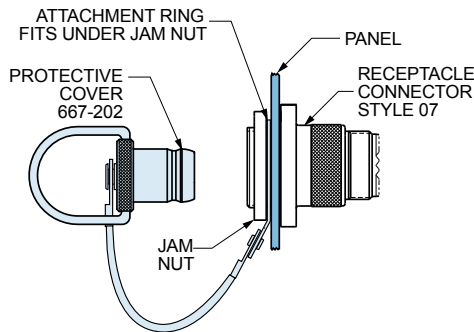

Large Ring

Dia. Code	Shell Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
28	14, 15	1.015	25.78	1.20	30.48
21	14, 15	1.135	28.8	1.25	31.8
30	16	1.380	35.1	1.48	37.6


667-202 Cover Attachment to Panel

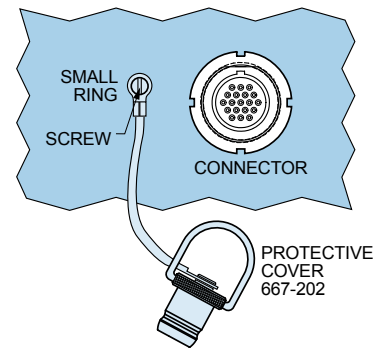

Small Ring for
Attaching Receptacle
Covers to a Panel with
a Screw

Dia. Code	Screw Size	Ring I.D.		Ring O.D.	
		In.	mm.	In.	mm.
01	#4, M3	.126	3.20	.31	7.9
02	#6	.145	3.68	.31	7.9
04	#8, M4	.188	4.78	.31	7.9
06	#10	.197	5.00	.31	7.9

Series 80 Mighty Mouse

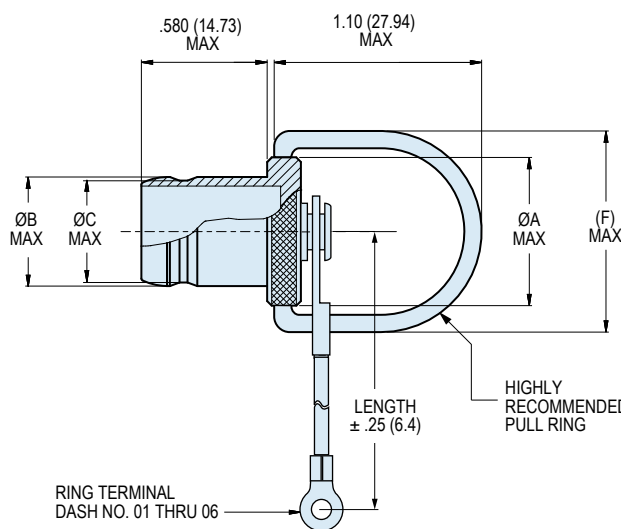

Dimensions

Shell Size	Ø A Max.		Ø B		Ø C		(F) Max	
	In	mm	In	mm	In	mm	In	mm
8	.614	15.60	.414	10.52	.383	9.73	.87	22.10
10	.773	19.63	.548	13.92	.513	13.03	1.03	26.16
14	.980	24.89	.781	19.84	.749	19.02	1.23	31.24
15	1.045	26.54	.843	21.41	.811	20.60	1.30	33.02
16	Contact Factory							

Lanyard Options



Nylon Rope

-65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter



Polyurethane Coated Wire Rope

Black polyurethane over stainless steel rope, -65° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter



Teflon® Jacketed Wire Rope

Translucent FEP jacket over stainless steel, -65° to +200°C., fair flexibility, good abrasion resistance, .100" diameter



Sash Chain

Stainless steel, #8 chain, .240" (6mm)



Slip Knot (SK)
for Attaching Covers to Cable

65° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.

M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[667-202NF12H3-11](#) [667-202NF9H3-10](#) [667-202M5G4-15](#) [667-202MT6H2-16](#) [667-202MT9H2-01](#) [667-202NF6R3-08R](#) [667-202ZNU8SK3](#) [667-202-M-7-S-6-06R](#) [667-202ZN6H3-09R](#) [667-202ZNU6SK6](#) [667-202MT6G6-16R](#) [667-202C6G2-02](#) [667-202NF5G2-14R](#) [667-202ZNU6G2-01R](#) [667-202M6H3-16R](#) [667-202M9U5-18R](#) [667-202ZNU7G4-01](#) [667-202M7D6-04](#) [667-202C7G2-18R](#) [667-202M7U6-18R](#) [667-202ZNU8G2-01R](#) [667-202C7N](#) [667-202MT12G6-19R](#) [667-202C10G4-19R](#) [667-202NF6R3-16R](#) [667-202C8G4-16R](#) [667-202NF9H5-18R](#) [667-202ZNU9H5-16R](#) [667-202M8H4-17](#) [667-202M5G6-15](#) [667-202ZN9SK6](#) [667-202C9G2-19R](#)