




UV Technology

Product information
MR[®] 94 UV-YokeR




MR[®] 94 UV-YokeR

UV module for mounting on hand yokes at fluorescent magnetic particle inspection

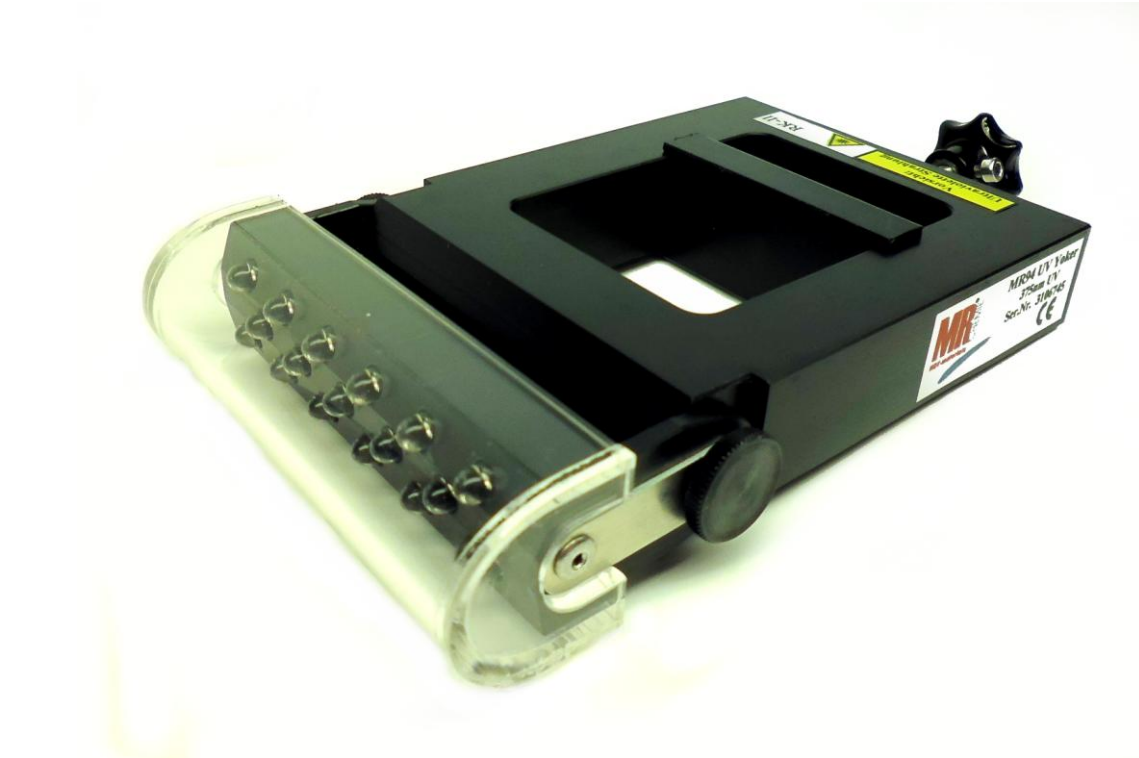

- Current supply by magnetic field
- Mountable on standard hand yokes
- Excellent light distribution of app. 120 mm at 100 mm distance
- With LED protection glass

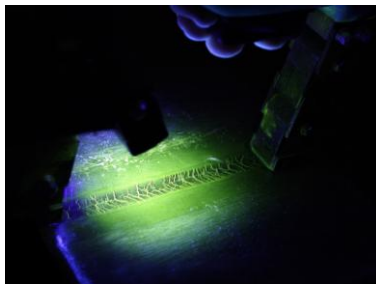

(Hand yoke not part of the scope of delivery)



UV Technology

Product information
MR[®] 94 UV-YokeR



Technical data:	
Order no. MR [®] 94 UV-YokeR	94 L
UV-LED risk class acc. to DGZfP/BGFE EM 6	2
Weight	217 g
Dimensions	L = 140 mm, B = 95 mm
Max. clamp size	50 x 50 mm
Peak	375 nm \pm 5 nm
Life span UV-LED	> 5.000 h
Rejected heat	< 30°C
UVB	0 W/m ²
UVA	Distance 10 cm: > 25 W/m ² Distance 5 cm: > 70 W/m ²
Spectral distribution	Distance 10 cm: \varnothing app. 120 mm

Spectrum (spectral distribution)

