




## COIL Spade terminals (DIN 46340)

# Z6..

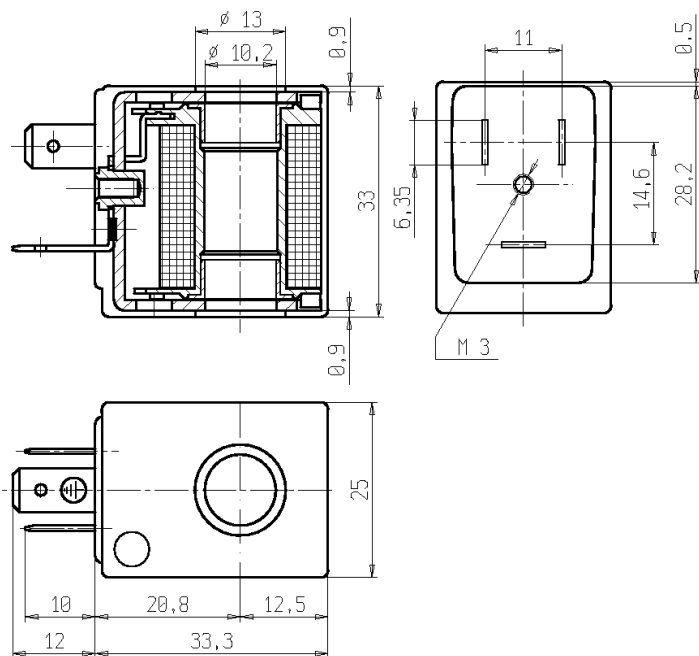

### ► GENERAL FEATURES

Complying with 73/23/EC directive and relative modification 93/68/EC.  
Complying with VDE 0580 standard (100% inspected).

### ► ELECTRIC CONNECTIONS

Spade terminals 6,3 x 0,8 (DIN46340), 2 line + 1 earth terminals.  
3 poles plug connector.

### ► ENCAPSULATION MATERIALS

PET (polyethylene terephthalate) fiberglass reinforced (black colour).

### ► TECHNICAL FEATURES

*Continuous duty*

ED 100%

*Insulation class*

**Z610A – Z610D** : F (155°C)

**Z614A** : H (180°C)

*Ambient temperature*

**Z610A – Z610D** : -10°C +60°C

**Z614A** : -10°C +80°C.

*Protection degree*

IP 65 (EN 60529) with plug connector

*Voltages*

DC

12-24V (+10% -5%)

AC

**Z610A – Z610D** : 24V/50-60Hz – 110V/50-60Hz  
(120V/60Hz) - 230V/50-60Hz (+10% -15%)

**Z614A**: 24V/50Hz – 110V/50Hz

(120V/60Hz) - 230V/50Hz (+10% -15%)

(Other voltages and frequencies on request).

TYPE	POWER ABSORPTION			NOTES	WEIGHT (kg)
	AC (VA)		DC (W)		
	Inrush	Holding			
Z610A	16	10	6	-	0,080
Z610D	14	7,5	4,5		
Z614A	16	10	6	1	

### ► NOTES

1 - UL APPROVAL (E153691)