

FE2owlet

FN030-4E_.WC_.7




Leistungsdaten
Performance data
1~ 230V 50/60Hz

P ₁	0,09/0,11	kW
I	0,38/0,48	A
n	1230/1360	min ⁻¹
I _A	0,57/0,56	A
ΔI	0	%
C _{400V}	3	μF
t _R	60/55	°C

Kennliniendaten


Characteristic data

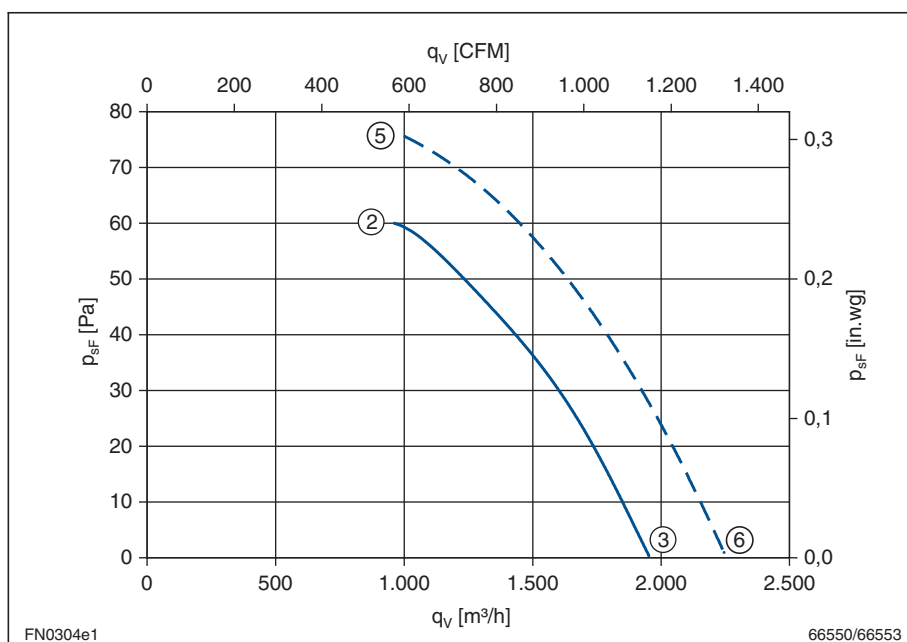

50Hz	U	I	P ₁	n
	V	A	W	min ⁻¹
②	230	0,38	86	1230
③		0,34	76	1320

60Hz	U	I	P ₁	n
	V	A	W	min ⁻¹
⑤	230	0,48	110	1360
⑥		0,44	100	1520

$$p_{d2} = 8,6 \cdot 10^{-6} \cdot q_v^2$$

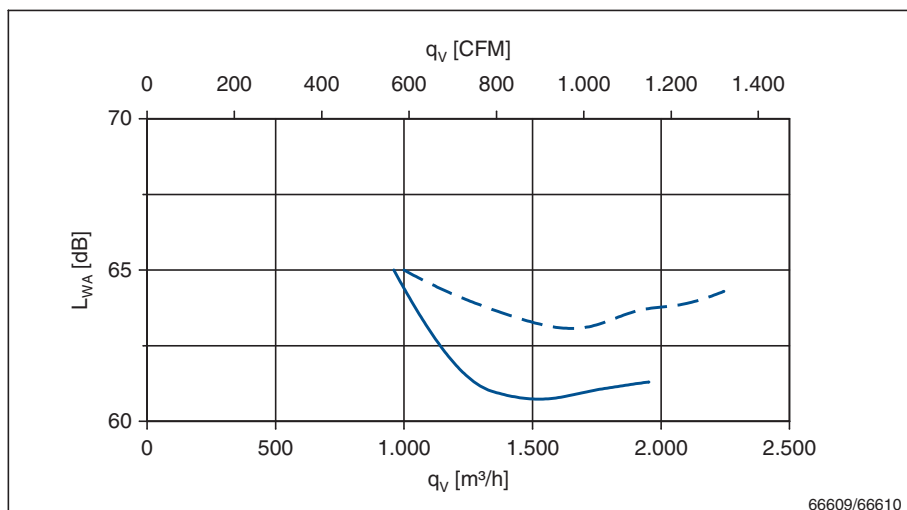

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth
without guard grille in
installation type A according
to ISO 5801

Maßblatt / Dimension sheet

Typ type	Artikel-Nr. article no.	Bauform design	Luftförderrichtung airflow direction	Gewicht weight	Maßblatt dimension sheet
FN030-4EA.WC.V7	139 735	A	V	2,7 kg	L-KL-2617/3
FN030-4EI.WC.V7	139 742	I	V	3,6 kg	L-KL-2618/3
FN030-4EH.WC.V7	139 749	H	V	5,1 kg	L-KL-2619/3
FN030-4EK.WC.V7	139 756	K	V	3,8 kg	L-KL-2620/3
FN030-4EA.WC.A7	139 707	A	A	2,7 kg	L-KL-2717/7
FN030-4ED.WC.A7	139 714	D	A	3,6 kg	L-KL-2618/7
FN030-4EL.WC.A7	139 721	L	A	5,1 kg	L-KL-2619/7

Schutzgitter/guard grille
Seite/page


Volldüse/Full bell mouth
Seite/page

Anschlussschaltbild/connection diagram
177X


Abmessungen

Dimensions


FN030-4EA.WC.V7

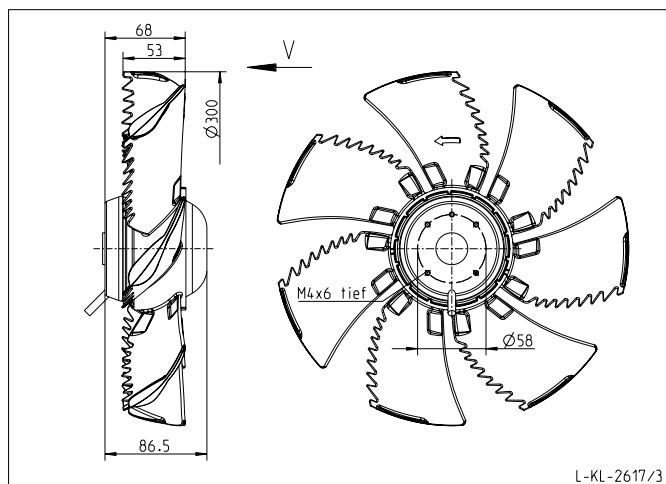

FN030-4EI.WC.V7

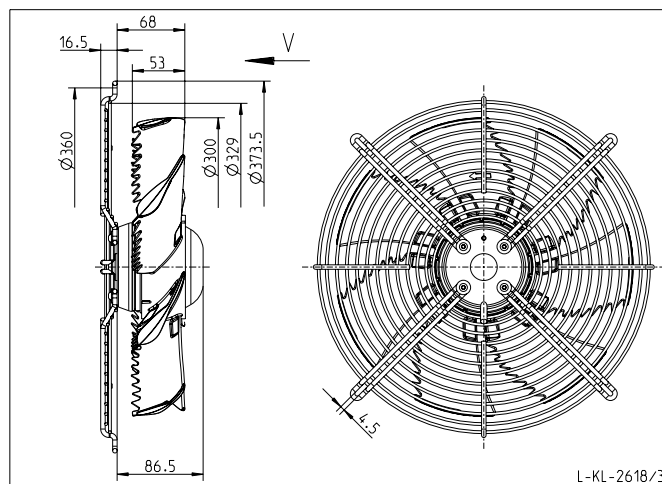

FN030-4EH.WC.V7

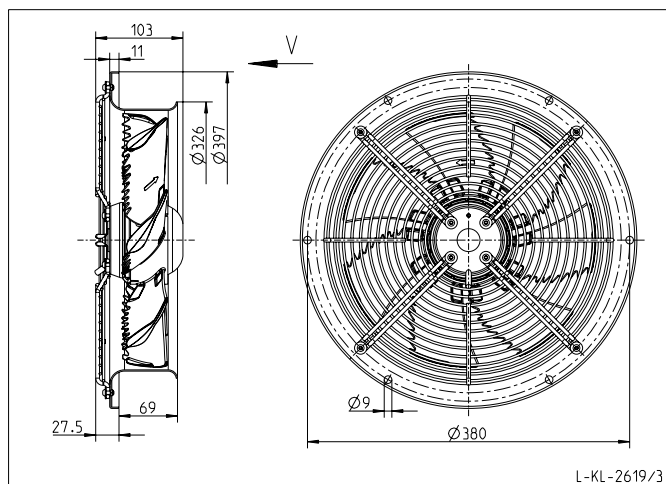

FN030-4EK.WC.V7

