


Oil Gauging

- Chrome Clad® for dark (heavy oils)
- Nubian® for light (clear oils)
- "Double Duty" oil gauging tapes with both Chrome Clad® and Nubian® (black) for dark (heavy) and light (clear) oils
- Made of heavy gauge 1/2" (13mm) x .012" (0.3mm) steel
- Snap-swivel hook on front end of tape for a plumb bob
- Two arm frames for shorter lengths; four arm frames for 30m/100' and greater
- Large drums and winding handles for quick and easy rewinding
- Handle folds over for storage and to lock line at extended position

Plumb bobs are not supplied with tapes. The last part of the catalog number denotes the style of the bob the tape is made to accept. Lufkin oil gauging tapes and plumb bobs are manufactured to meet the applicable specifications outlined in the National Institute of Standards and Technology Handbook 44, 2011 Edition, Section 5.52. Manufacturing tolerances for final measurement comply with API MPMS Second Edition, August 2005, Chapter 3, Section 1A, Appendix 1.2.

1. Never gauge a tank during an electrical storm.
2. Ground yourself and your tools by touching the tank ladder before climbing the ladder. Do not wear gloves when grounding yourself. Gloves prevent proper grounding.
3. Ground yourself before opening the gauging hatch by touching the handrail or platform (without gloves on). During and after removal of the gauging cover, stand so that the gas will not be inhaled. Wear a gas mask if toxic gases are present.
4. Always maintain contact between the gauging tape and the edge of the hatch from the moment the gauge bob enters the hatch until the gauge bob is removed from the hatch.

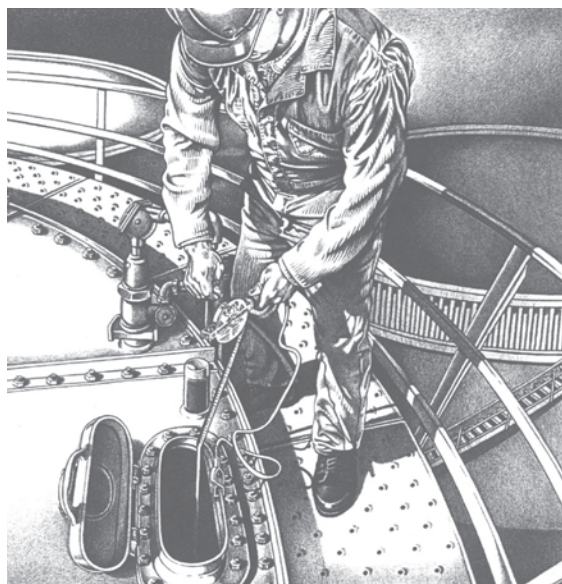

Lufkin

Atlas® Chrome Clad® / Nubian® Double Duty

- Black markings bonded to steel and recessed beneath multiple layers of nickel and chrome electroplating provides greater resistance to wear and corrosion
- All tapes read right to left
- Heavy-duty frame designed for years of rugged use
- All frames include a grounding strap
- Plumb bob must be ordered separately



| Cat. No. | Bob Cut | UPC No. | Packed | Blade Size Width | Blade Size Length | Blade Style | Pack Wt. lb | Pack Wt. kg | Shelf Pack | Replacement Blade | UPC No. |
|-----------------|---------|--------------|--------|------------------|-------------------|-------------|-------------|-------------|------------|-------------------|--------------|
| CN129012SF590 | 590 | 037103459527 | Boxed | 1/2" | 18' | D1 | 1.25 | .57 | 1 | OCN129012SF590 | 037103459633 |
| CN1290SF590 | 590 | 037103459534 | Boxed | 1/2" | 25' | D1 | 1.51 | .68 | 1 | OCN1290SF590 | 037103459640 |
| CN1290SMEF590 | 590 | 037103001696 | Boxed | 1/2" (13mm) | 25' (8m) | D3 | 1.51 | .68 | 1 | - | - |
| CN1291SF590 | 590 | 037103459541 | Boxed | 1/2" | 33' | D1 | 1.65 | .75 | 1 | OCN1291SF590 | 037103459657 |
| CN1293SF58712 | 5871/2 | 037103459763 | Boxed | 1/2" | 50' | D1 | 2.07 | .94 | 1 | - | - |
| CN1293SF590 | 590 | 037103459558 | Boxed | 1/2" | 50' | D1 | 2.07 | .94 | 1 | OCN1293SF590 | 037103459664 |
| CN1293SDF590 | 590 | 037103459596 | Boxed | 1/2" | 50' | D2 | 2.07 | .94 | 1 | - | - |
| CN1293SMEF590 | 590 | 37103459602 | Boxed | 1/2" (13mm) | 50' (15m) | D3 | 2.07 | .94 | 1 | OCN1293SMEF590 | 037103459718 |
| CN1294SF58712 | 5871/2 | 037103459770 | Boxed | 1/2" | 66' | D1 | 2.38 | 1.08 | 1 | - | - |
| CN1294SF590 | 590 | 037103459565 | Boxed | 1/2" | 66' | D1 | 2.38 | 1.08 | 1 | OCN1294SF590 | 037103459671 |
| CN1294SMEF590 | 590 | 037103459619 | Boxed | 1/2" (13mm) | 66' (20m) | D3 | 2.38 | 1.08 | 1 | OCN1294SMEF590 | 037103459725 |
| CN1295SF590 | 590 | 037103459572 | Boxed | 1/2" | 75' | D1 | 2.57 | 1.17 | 1 | OCN1295SF590 | 037103459688 |
| CN1295SMEF58712 | 5871/2 | 037103440815 | Boxed | 1/2" (13mm) | 75' (23m) | D3 | 2.57 | 1.17 | 1 | - | - |
| CN1295SMEF590 | 590 | 037103122124 | Boxed | 1/2" (13mm) | 75' (23m) | D3 | 2.88 | 1.31 | 1 | OCN1295SME590 | 037103122117 |
| CN1296SF590 | 590 | 037103459589 | Boxed | 1/2" | 100' | D1 | 3.4 | 1.54 | 1 | OCN1296SF590 | 037103459695 |
| CN1296SMEF590 | 590 | 037103459626 | Boxed | 1/2" (13mm) | 100' (30m) | D3 | 3.46 | 1.57 | 1 | OCN1296SMEF590 | 037103459732 |
| CN1298SMEF590 | 590 | 037103104243 | Boxed | 1/2" (13mm) | 125' (38m) | D3 | 3.89 | 1.76 | 1 | - | - |