


SMT Common Mode Chokes

0.5A to 20Adc

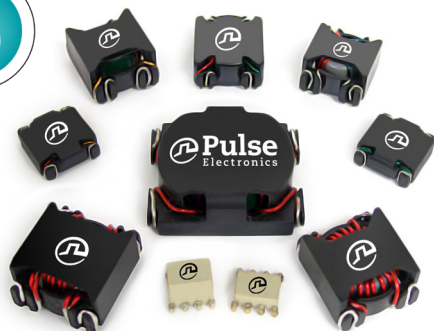

- Wide variety of package sizes available
- Current Rating:** 0.5Arms to 20Arms
- Inductances Range:** 61uH to 13.2mH
- Dielectric strength:** 1500Vrms (380Vrms continuous)

Electrical Specifications at 25° C Temp Range -40 ° C to 125 ° C

| Part Number | Irated ¹ (Arms or Adc) | Inductance ⁴ per Winding (uH +/-35%) | DCR per Winding (mΩ Max) | Leakage Inductance ⁵ (uH Min) | Typical SRF (MHz) | Typical Impedance at SRF (Ω) | Platform Name | Package Size (mm Max) | Weight (grms) | Quantity In Tube ³ | Quantity in T&R ³ |
|-------------|--------------------------------------|---|-----------------------------|---|-------------------|------------------------------|---------------|-----------------------|---------------|-------------------------------|------------------------------|
| PE-53914NL | 0.5 | 13200* | 850 | - | 0.19 | 6500 | LCCI-37-2 | 16.4 x 14.2 x 8.9 | 2.3 | 30 | 500 |
| PA2742NL | 1 | 397 | 92 | 0.6 | 6 | 1500 | High Shasta | 9.1 x 8.9 x 7.9 | 0.6 | 50 | 400 |
| PE-53913NL | 1 | 6000* | 450 | - | 0.22 | 6000 | LCCI-37-2 | 16.4 x 14.2 x 8.9 | 2.3 | 30 | 500 |
| PA2741NL | 1.1 | 94 | 30 | 0.3 | 15 | 450 | Low Shasta | 9.1 x 8.9 x 3.8 | 0.3 | 60 | 125 |
| P0354NL | 1.22 | 1170 | 200 | 8.3* | 3 | 8200 | Polecat | 12.7 x 12.7 x 8.4 | 1.4 | 40 | 500 |
| PA2752NL | 1.4 | 1010 | 210 | 25 | 4 | 27500 | LCCI-50-1 | 19.6 x 17.0 x 9.9 | 4.5 | 30 | 200 |
| PE-53911NL | 1.5 | 900* | 60 | - | 3 | 2800 | LCCI-37-2 | 16.4 x 14.2 x 8.9 | 2.4 | 30 | 500 |
| P0473NL | 1.63 | 880 | 110 | 6.0* | 4 | 6750 | Polecat | 12.7 x 12.7 x 8.4 | 1.4 | 40 | 500 |
| PA2748NL | 1.8 | 1125 | 55 | 3 | 4 | 3200 | Polecat | 12.7 x 13.2 x 5.6 | 1.6 | 40 | 500 |
| PE-53912NL | 2.5 | 1800* | 80 | - | 2 | 5000 | LCCI-50-3 | 19.6 x 17.0 x 9.9 | 4.9 | 30 | 200 |
| P0351NL | 2.8 | 1470 | 80 | 11.3* | 2 | 10700 | LCCI-50-1 | 19.6 x 17.0 x 9.9 | 4.3 | 30 | 200 |
| PA3927NL | 3 | 800 | 27 | 1.5 | 20 | 1300 | Polecat | 13.0 x 13.0 x 8.6 | 2.4 | 40 | 500 |
| P0420NL | 3.3 | 1320 | 60 | 8.5* | 2.5 | 9600 | LCCI-50-1 | 19.6 x 17.0 x 9.9 | 4.5 | 30 | 200 |
| P0421NL | 3.3 | 220 | 60 | 9.8* | 18 | 10500 | LCCI-50-1 | 19.6 x 17.0 x 9.9 | 4.7 | 30 | 200 |
| PA2743NL | 3.3 | 383 | 18 | 1 | 2.5 | 1400 | Polecat | 13.0 x 13.0 x 5.6 | 1.7 | 40 | 500 |
| PE-53910NL | 3.6 | 600* | 50 | - | 8 | 1800 | LCCI-50-3 | 19.6 x 17.0 x 9.9 | 5.0 | 30 | 200 |
| PA2749NL | 3.8 | 536 | 17.1 | 1.2 | 2 | 1400 | LCCI-37-1 | 16.4 x 14.2 x 8.9 | 2.5 | 30 | 500 |
| PA2744NL | 4 | 280 | 13.2 | 0.7 | 2 | 1000 | Polecat | 13.0 x 13.0 x 5.6 | 1.6 | 40 | 500 |
| PA2751NL | 4.2 | 486 | 16 | 1 | 2 | 1800 | LCCI-44LP | 18.2 x 15.0 x 7.6 | 3 | 35 | 300 |
| P0422NL | 4.7 | 770 | 40 | 5.2* | 3 | 6400 | LCCI-50-1 | 19.6 x 17.0 x 9.9 | 4.7 | 30 | 200 |
| PA2745NL | 5 | 130 | 6.75 | 0.4 | 3 | 500 | Polecat | 13.2 x 13.2 x 5.6 | 1.6 | 40 | 500 |
| P0353NL | 5.6 | 590 | 21 | 4.5* | 4 | 4900 | LCCI-50-1 | 19.6 x 17.0 x 9.9 | 5 | 30 | 200 |
| PA2746NL | 6 | 96 | 4.3 | 0.25 | 4 | 350 | Polecat | 13.2 x 13.2 x 5.6 | 1.7 | 40 | 500 |
| PA2750NL | 6 | 400 | 9.4 | 1.25 | 9 | 900 | LCCI-44 | 18.2 x 15.0 x 10.0 | 3.5 | 30 | 200 |
| PA2747NL | 7 | 61 | 2.9 | 0.15 | 4 | 200 | Polecat | 13.5 x 13.5 x 5.6 | 1.7 | 40 | 500 |
| P0527NL | 7.2 | 530 | 15 | 5.1* | 4 | 3100 | HCCI-68 | 28.2 x 25.4 x 10.0 | 7.3 | 20 | 100 |

SMT Common Mode Chokes

0.5A to 20Adc

| Part Number | Irated ¹ (Arms or Adc) | Inductance ⁴ per Winding (uH +/-35%) | DCR per Winding (mΩ Max) | Leakage Inductance ⁵ (uH Min)) | Typical SRF (MHz) | Typical Impedance at SRF (Ω) | Platform Name | Package Size (mm Max) | Weight (grms) | Quantity In Tube ³ | Quantity in T&R ³ |
|-------------|--------------------------------------|---|-----------------------------|--|-------------------|------------------------------|---------------|-----------------------|---------------|-------------------------------|------------------------------|
| PA2756NL | 8 | 484 | 7.7 | 1.5 | 2.5 | 1700 | LCCI-50-2 | 19.6 x 17.0 x 9.9 | 4.7 | 30 | 200 |
| PA2757NL | 9 | 1030 | 9.75 | 3 | 2.5 | 1900 | HCCI-80-1 | 31.0 x 25.4 x 12.7 | 14.6 | 20 | 75 |
| P0429NL | 9.7 | 810 | 14 | 9.1* | 3 | 6400 | HCCI-80-2 | 31.0 x 25.4 x 12.7 | 15.2 | 20 | 75 |
| PA2754NL | 10 | 215 | 3.75 | 0.5 | 4 | 600 | Makeni | 21.1 x 19.1 x 11.2 | 6.2 | 25 | 150 |
| P0469NL | 11.6 | 630 | 10 | 7.4* | 4 | 4900 | HCCI-80-2 | 31.0 x 25.4 x 12.7 | 15.2 | 20 | 75 |
| PA2753NL | 12.5 | 95 | 3 | 0.15 | 2 | 200 | LCCI-50-2 | 19.6 x 17.0 x 9.9 | 4.2 | 30 | 200 |
| P0502NL | 14 | 470 | 8 | 5.3* | 3 | 3750 | HCCI-80-2 | 31.0 x 25.4 x 12.7 | 16.2 | 20 | 75 |
| PA2755NL | 14 | 117 | 1.95 | 0.3 | 6 | 250 | Makeni | 21.1 x 19.1 x 11.2 | 4.8 | 25 | 150 |
| PA2670NL | 16 | 500 | 4.25 | 1.5 | 4 | 1000 | HCCI-80-2 | 31.0 x 25.4 x 12.7 | 17.8 | 20 | 75 |
| PG1265NL | 20 | 380 | 4.1 | 1.2 | 1 | 900 | HCCI-80-2 | 31.0 x 25.4 x 12.7 | 14.5 | 20 | 75 |



NOTE:

1. The current rating (Irated) is based upon the temperature rise of the component and represents the rms current which will cause a typical temperature rise of 55C with 50LFM forced cooling
2. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
3. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA2741NL becomes PA2741NLT). Pulse complies to industry standard tape and reel specification EIA481.
4. Inductance values shown are all nominal +/- 35% except those identified with an asterisk (*) which indicates that the inductance is a minimum value.
5. Leakage inductance values as shown are the minimum value except those identified with an asterisk (*) which indicates the value shown in a typical value.



SMT Common Mode Chokes

0.5A to 20Adc



Impedance Plots

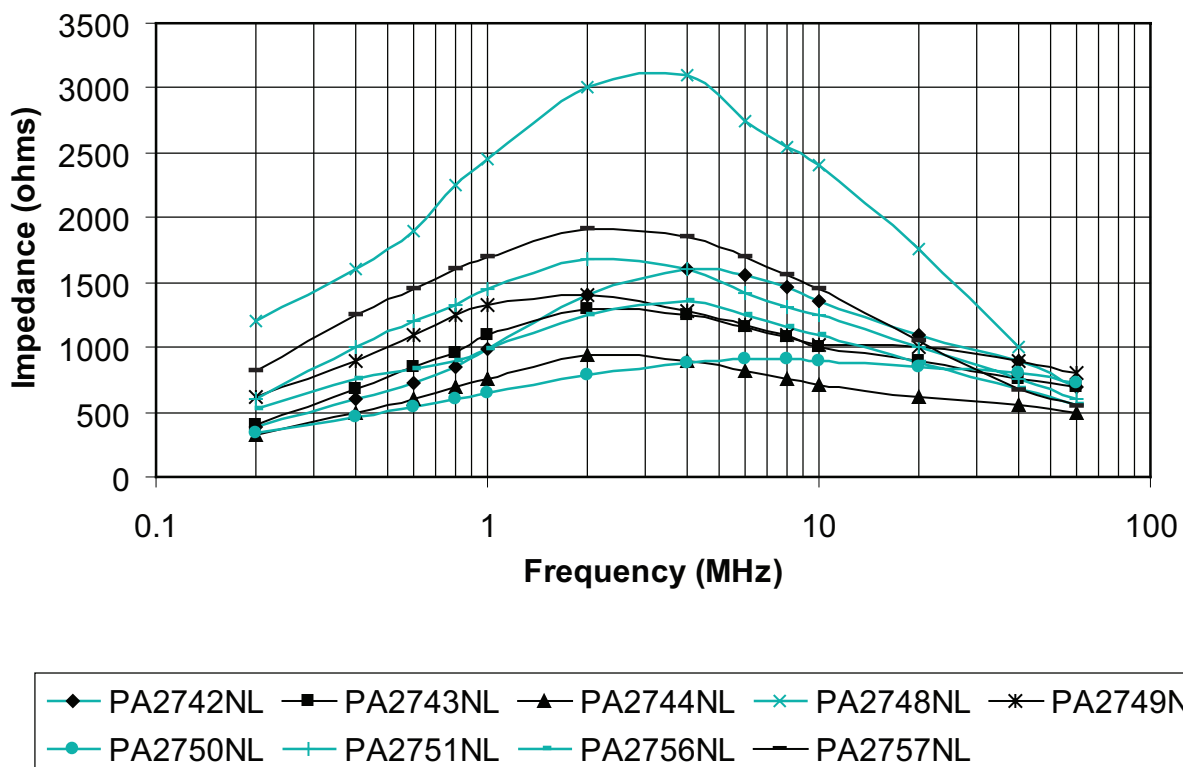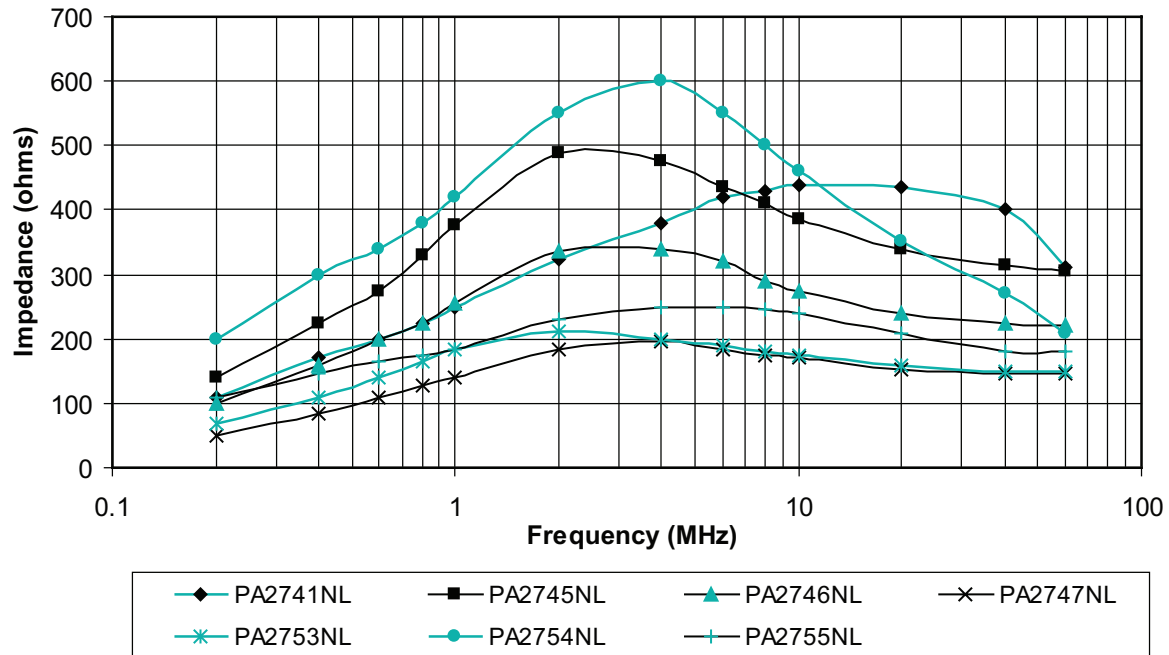


Impedance Plots

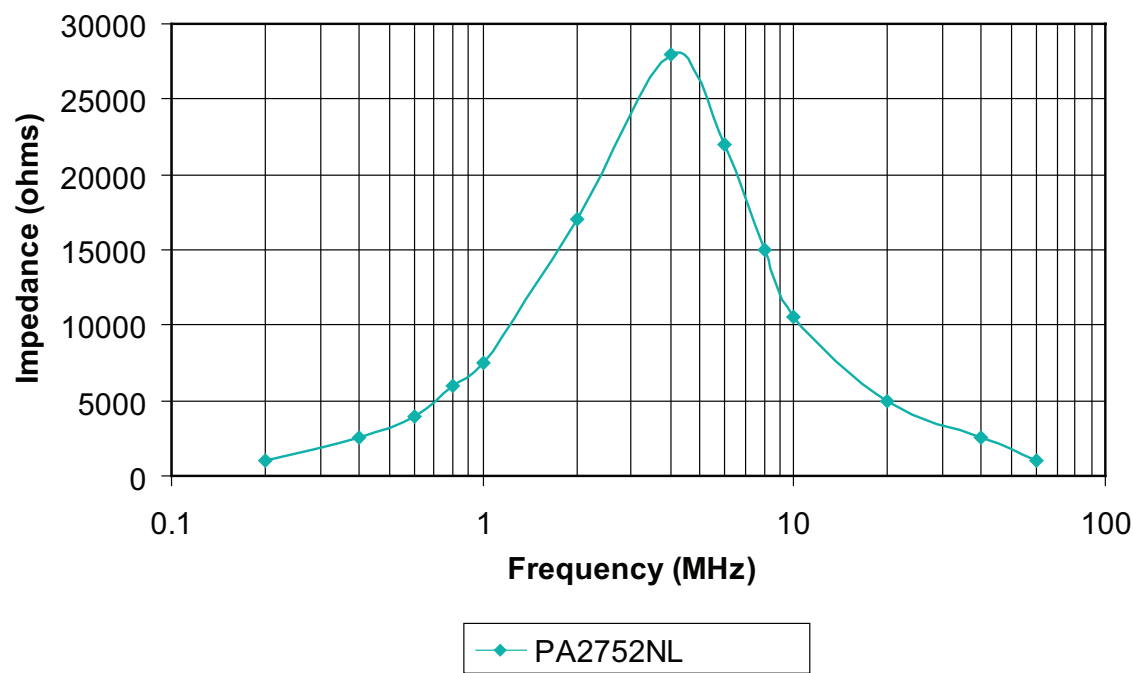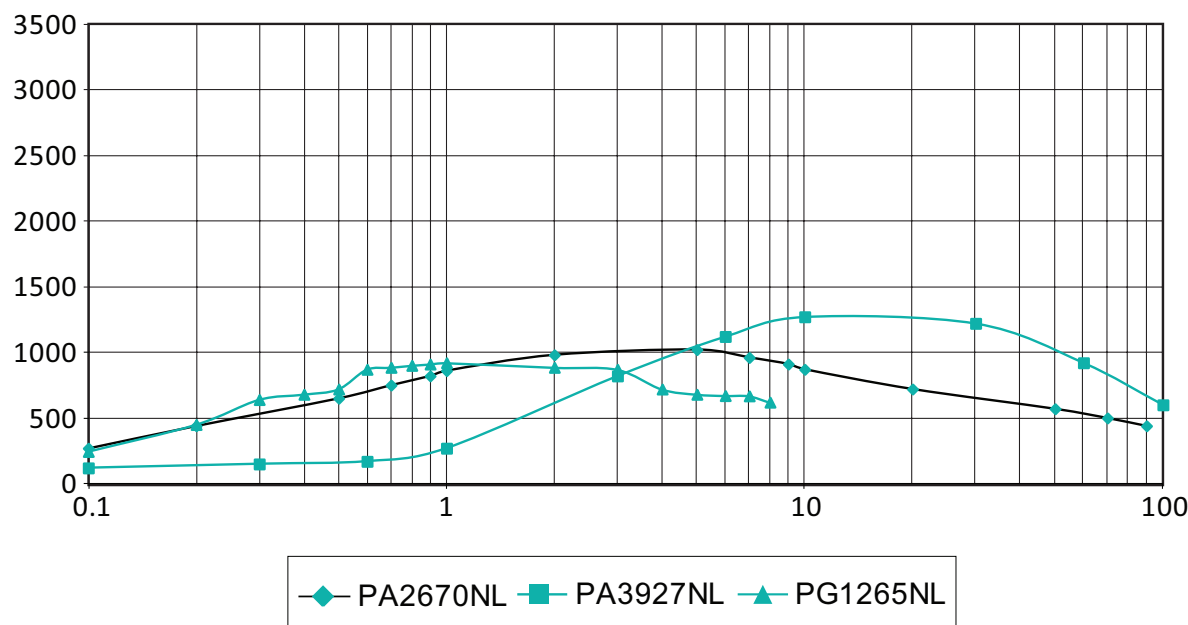

Impedance Plots

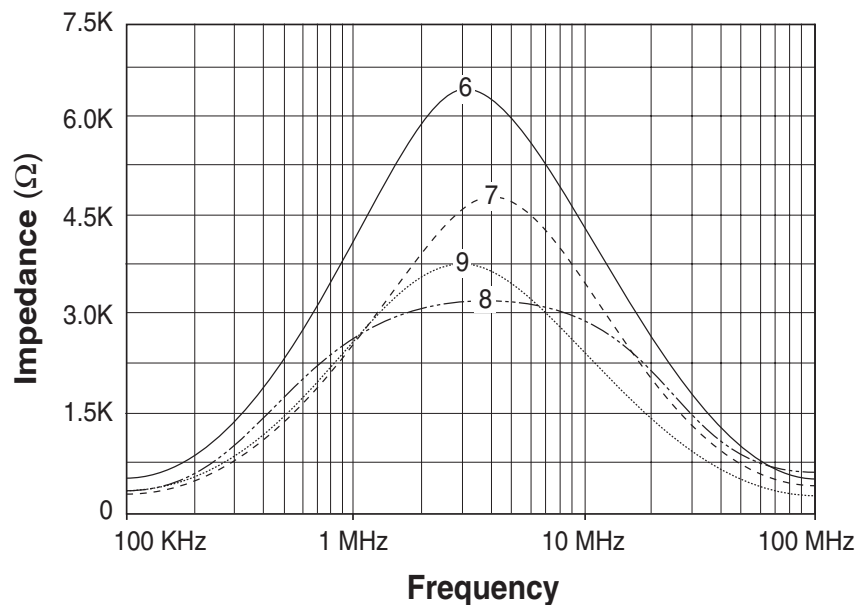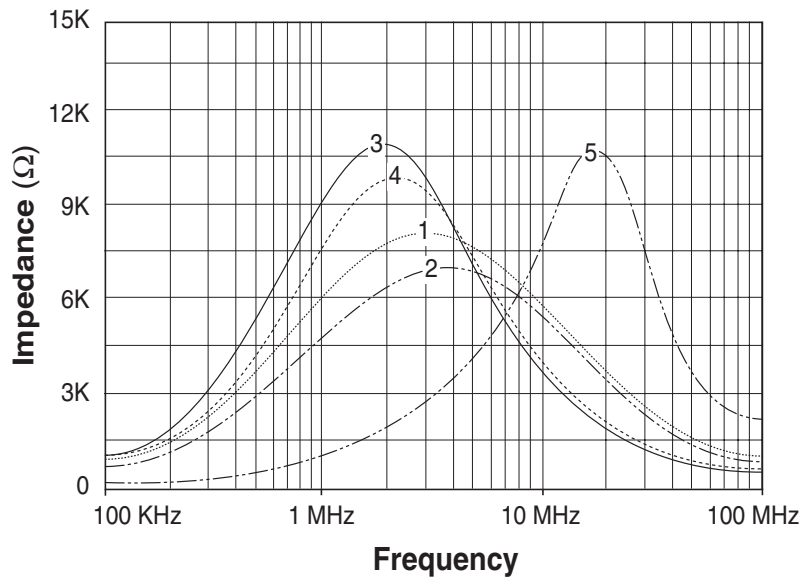

Impedance Plots

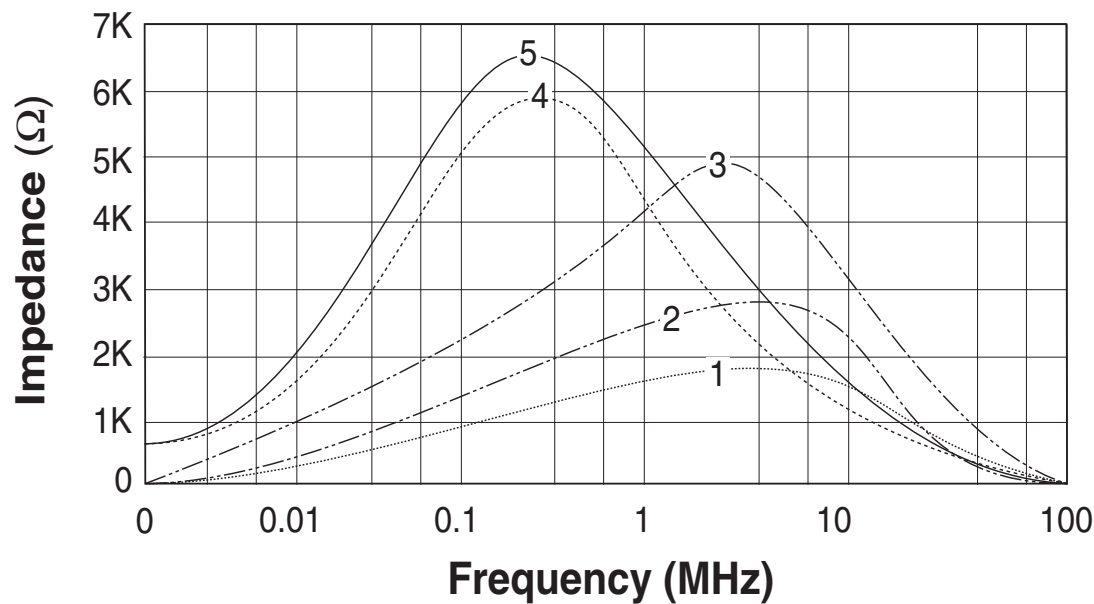


| | | |
|----------------|----------------|----------------|
| 1 - PE-53910NL | 3 - PE-53912NL | 5 - PE-53914NL |
| 2 - PE-53911NL | 4 - PE-53913NL | |

SMT Common Mode Chokes



0.5A to 20Adc

Mechanicals


Low Shasta - PA2741NL

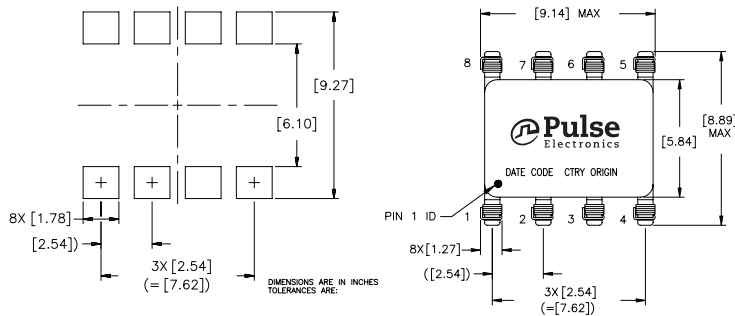



Schematic



High Shasta - PA2742NL

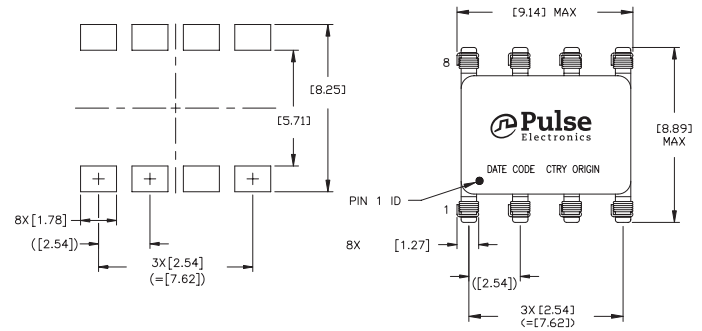


Schematic



Please note that for PA2741NL and PA2742NL the part should be connected as follows:
Customer to connect pins (1,2) and (4,3) together on board to form a single winding (1,2-4,3).
Customer to connect pins (8,7) and (5,6) together on board to form a single winding (8,7-5,6)
All ratings (leakage and DCR) are with respect to the above winding configuration.

PoleCat - PA2743NL, PA2744NL, PA2745NL, PA2746NL, PA2747NL, PA2748NL, PA3927NL, P0473NL, and P0354NL

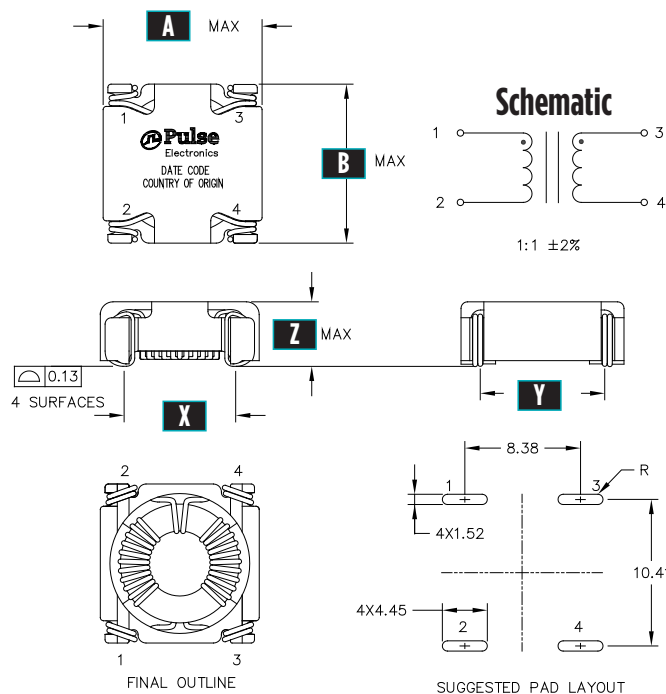

Polecat Dimensions


| Part Number | A | B | X | Y | Z |
|-------------|------|------|-----|------|-----|
| PA2743NL | 13.0 | 13.0 | 8.4 | 10.4 | 5.6 |
| PA2744NL | 13.0 | 13.0 | 8.4 | 10.4 | 5.6 |
| PA2745NL | 13.2 | 13.2 | 8.6 | 10.7 | 5.6 |
| PA2746NL | 13.2 | 13.2 | 8.6 | 10.7 | 5.6 |
| PA2747NL | 13.5 | 13.5 | 8.6 | 10.7 | 5.6 |
| PA2748NL | 12.7 | 13.2 | 8.4 | 10.4 | 5.6 |
| PA3927NL | 13.0 | 13.0 | 8.4 | 10.4 | 8.6 |
| PA473NL | 12.7 | 12.7 | 8.4 | 10.4 | 5.5 |
| PA0354NL | 12.7 | 12.7 | 8.4 | 10.4 | 5.5 |

SMT Common Mode Chokes


0.5A to 20Adc

Mechanicals


LCCI-37-1 - PA2749NL

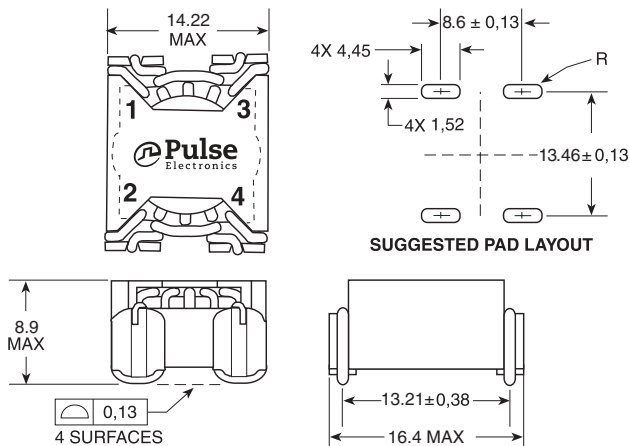


Schematic




LCCI-44 - PA2750NL

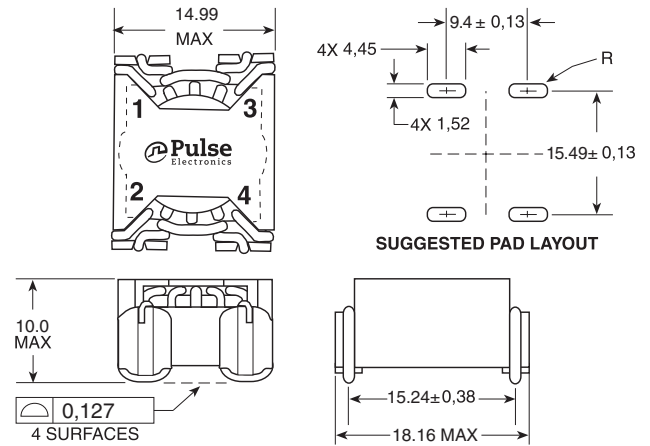


Schematic




LCCI-44LP - PA2751NL

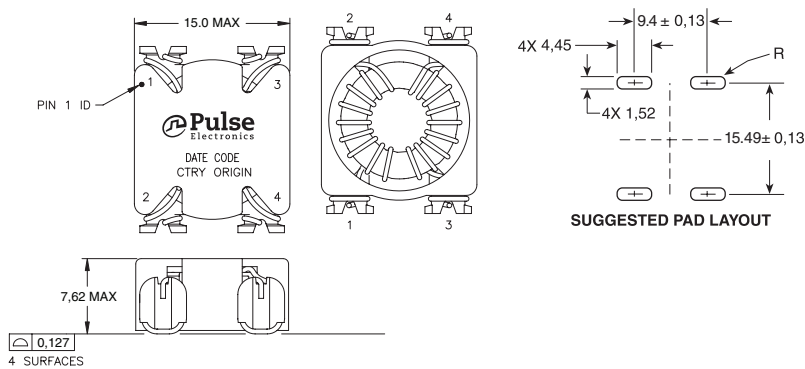


Schematic



LCCI-50-1 - PA2752NL, P0353NL, P0422NL, P0421NL, P0420NL, P0351NL

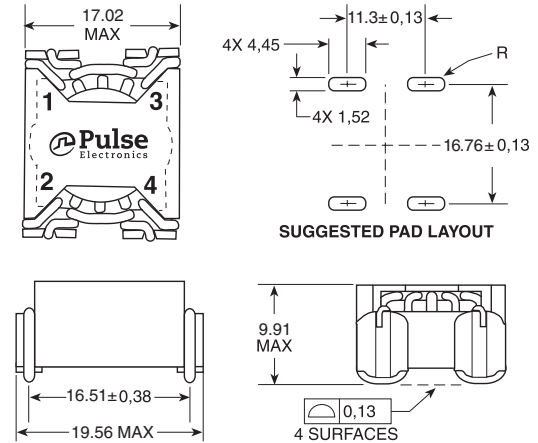

Schematic





SMT Common Mode Chokes

0.5A to 20Adc

Mechanicals

Schematics



LCCI-50-2 - PA2753NL and PA2756NL

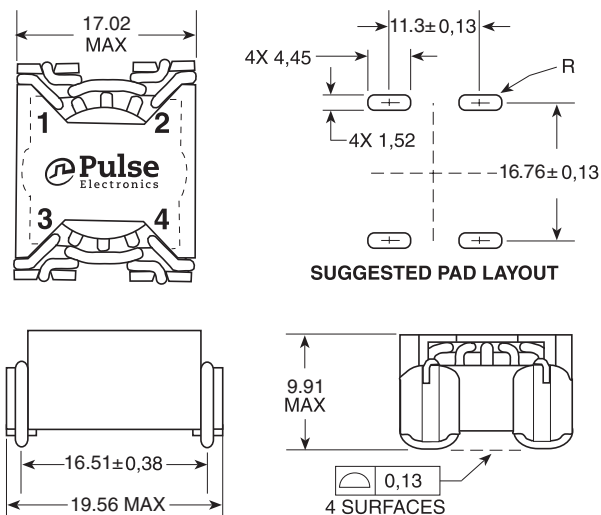

Mechanicals

Schematics

LCCI-37-2 & LCCI-50-3 - PE-5391xNL

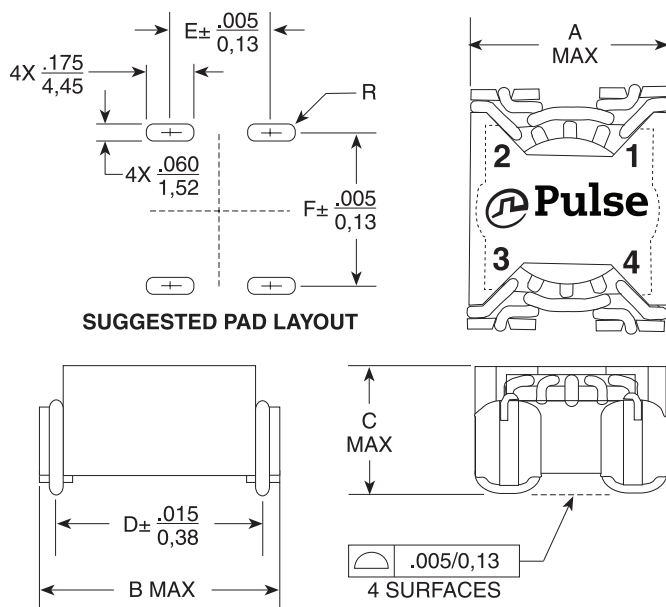

| Size | A | B | C | D | E | F |
|-----------|------------|------------|-----------|------------|------------|------------|
| LCCI-37-2 | .560/14,22 | .645/16,38 | .350/8,89 | .520/13,21 | .340/8,64 | .530/13,46 |
| LCCI-50-3 | .670/17,02 | .770/19,56 | .390/9,90 | .650/16,51 | .445/11,30 | .660/16,76 |


SMT Common Mode Chokes

0.5A to 20Adc


Mechanicals

Schematics

Makeni - PA2754NL, PA2755NL

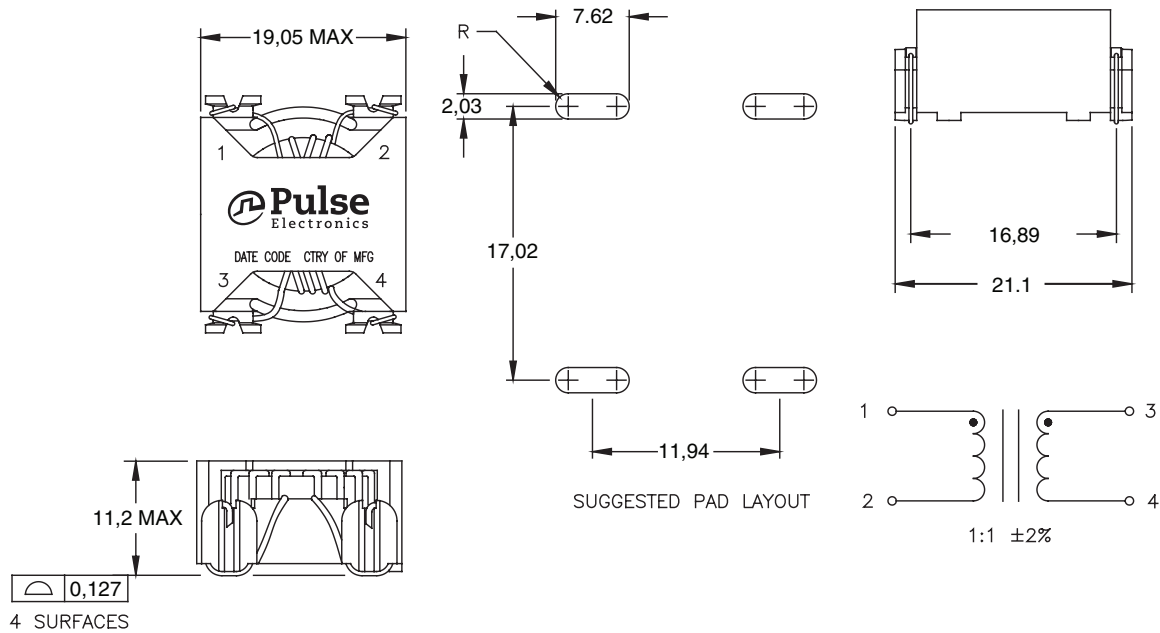

HCCI-68 - P0527NL

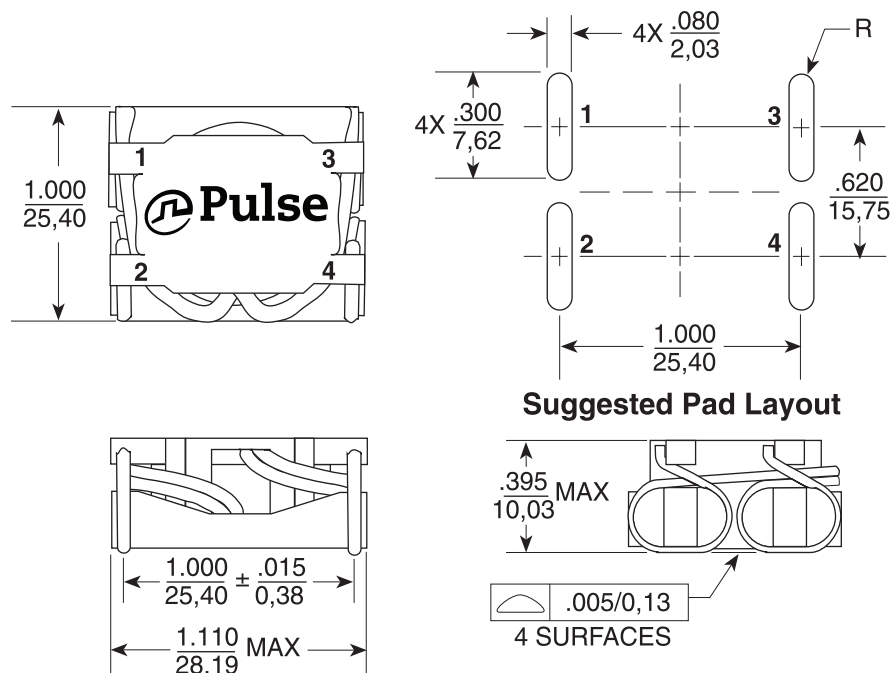


SMT Common Mode Chokes

1.0A to 20.0A

Mechanical

Schematic

HCCI-80-1 - PA2757NL

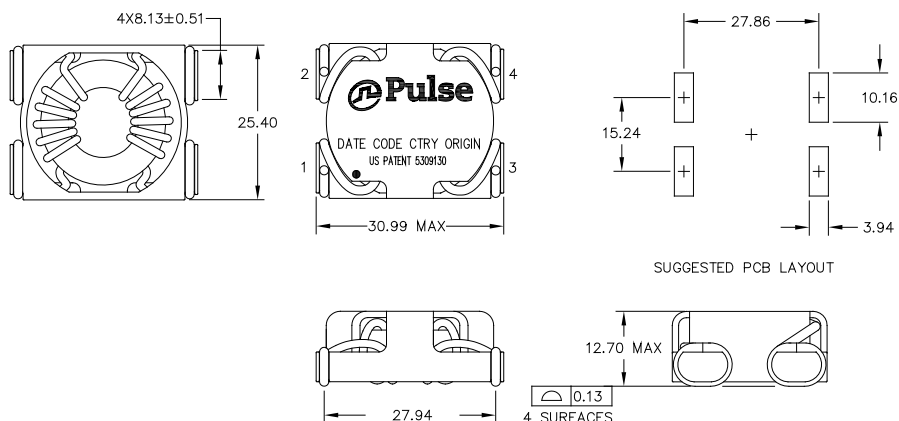

Mechanical

Schematic

HCCI-80-2 - PA2670NL, PG1265NL, P0502NL, P0469NL and P0429NL

