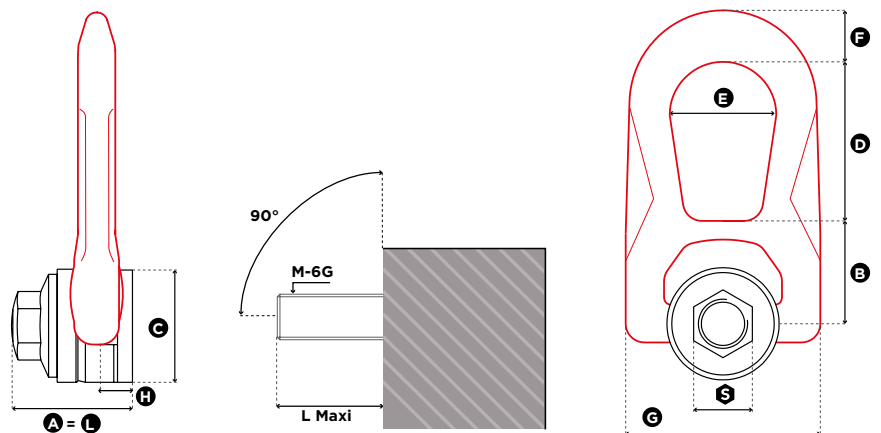
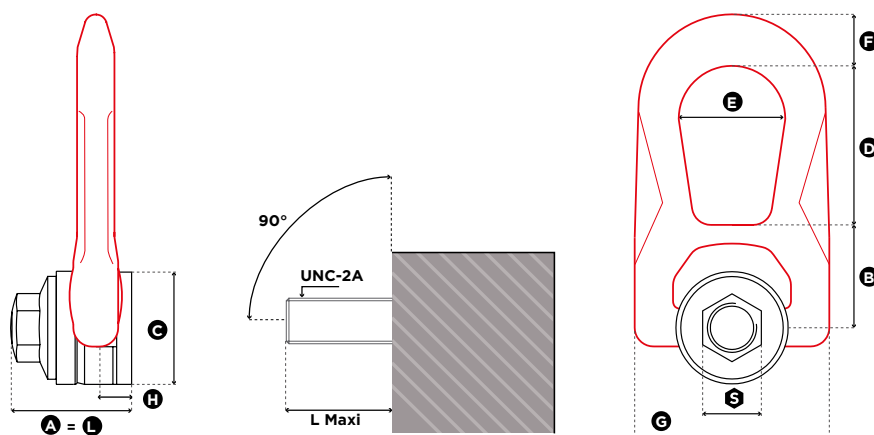


**FE.DSR****FEMALE DOUBLE SWIVEL RING****GradUp**

1 in = 25.4 mm

Reference	Diameter	SF 5:1 WLL (t)	SF 4:1 WLL (t)	L Maxi (mm)	Torque (Nm)	<b>S</b> (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
<b>FE.DSR M 8 UP</b>	M 8 (x1,25)	<b>0,40</b>	<b>0,50</b>	45	6	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR M 10 UP</b>	M 10 (x1,5)	<b>0,70</b>	<b>0,90</b>	45	10	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR M 12 UP</b>	M 12 (x1,75)	<b>1,05</b>	<b>1,30</b>	45	15	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR M 14 UP</b>	M 14 (x2)	<b>1,40</b>	<b>1,80</b>	45	30	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR M 16 UP</b>	M 16 (x2)	<b>2,00</b>	<b>2,30</b>	45	50	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR M 18 UP</b>	M 18 (x2,5)	<b>2,30</b>	<b>2,30</b>	62	70	24	62	55	60	83	55	25	115	19	2,6
<b>FE.DSR M 20 UP</b>	M 20 (x2,5)	<b>2,50</b>	<b>2,50</b>	62	100	24	62	55	60	83	55	25	115	19	2,6
<b>FE.DSR M 22 UP</b>	M 22 (x2,5)	<b>3,50</b>	<b>4,50</b>	62	120	24	62	55	60	83	55	25	115	19	2,6

**FE.DSR****FEMALE DOUBLE SWIVEL RING****GradUp**

1 in = 25.4 mm

Reference	Diameter	SF 5:1 WLL (lbs)	SF 4:1 WLL (lbs)	L Maxi (mm)	Torque (ft-lb)	<b>S</b> (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
<b>FE.DSR U 025 UP</b>	UNC 1/4"-20	<b>330</b>	<b>450</b>	45	3	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR U 516 UP</b>	UNC 5/16"-18	<b>1,000</b>	<b>1,200</b>	45	5	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR U 038 UP</b>	UNC 3/8"-16	<b>1,300</b>	<b>1,600</b>	45	8	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR U 050 UP</b>	UNC 1/2"-13	<b>2,400</b>	<b>2,800</b>	45	12	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR U 058 UP</b>	UNC 5/8"-11	<b>3,900</b>	<b>4,900</b>	45	40	20	45	40	45	53	38	17	76	13	0,9
<b>FE.DSR U 075 UP</b>	UNC 3/4"-10	<b>5,250</b>	<b>5,250</b>	62	80	24	62	55	60	83	55	25	115	19	2,6
<b>FE.DSR U 078 UP</b>	UNC 7/8"-9	<b>7,900</b>	<b>9,800</b>	62	90	24	62	55	60	83	55	25	115	19	2,6