




Maßtabellen

Form BN

Beachten Sie bitte Kapitel IV

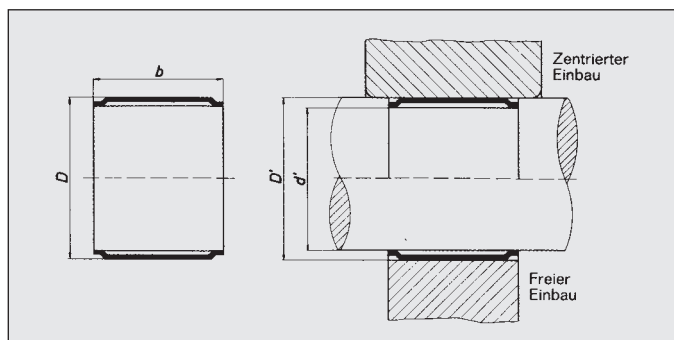

Kurzzeichen	Toleranzhülsenmaße		Bohrung	Maße der Anschlußteile		Belastungswerte		
	D mm	b mm		Wälzlager- einbau d' mm	Drehmoment- übertragung d' mm	Übertragbares Drehmoment M Nm	Zulässige Radiallast P N	Gewicht ca. kg/1000 Stück
BN15-506	15	6	15	13,52 ...13,59	13,70 ... 13,77	3,70	1200	0,41
BN15-508	15	8	15	13,52 ...13,59	13,70 ... 13,77	3,90	1600	0,54
BN15-510	15	10	15	13,52 ...13,59	13,70 ... 13,77	4,80	2025	0,68
BN15-512	15	12	15	13,52 ...13,59	13,70 ... 13,77	6,80	2650	0,81
BN15-514	15	14	15	13,52 ...13,59	13,70 ... 13,77	8,90	2950	0,95
BN15-516	15	16	15	13,52 ...13,59	13,70 ... 13,77	11,00	3400	1,10
BN15-019	+	15	15	13,52 ...13,59	13,70 ... 13,77	12,50	3900	1,30
BN16-510	*	16	16	14,52 ...14,59	14,70 ... 14,77	7,00	2600	0,73
BN16-514		16	16	14,52 ...14,59	14,70 ... 14,77	10,50	3100	1,02
BN16-516		16	16	14,52 ...14,59	14,70 ... 14,77	12,00	3500	1,17
BN17-506		17	17	15,52 ...15,59	15,70 ... 15,77	3,90	1500	0,47
BN17-508		17	17	15,52 ...15,59	15,70 ... 15,77	4,80	1800	0,62
BN17-510		17	17	15,52 ...15,59	15,70 ... 15,77	8,00	2650	0,78
BN17-512		17	17	15,52 ...15,59	15,70 ... 15,77	10,00	2800	0,93
BN17-514	*	17	17	15,52 ...15,59	15,70 ... 15,77	12,00	3200	1,09
BN17-516	*	17	17	15,52 ...15,59	15,70 ... 15,77	14,00	3650	1,24
BN18-010	+	18	18	16,52 ...16,59	16,70 ... 16,77	9,00	2650	0,91
BN18-516		18	18	16,52 ...16,59	16,70 ... 16,77	15,00	3900	1,32
BN18-522		18	18	16,52 ...16,59	16,70 ... 16,77	21,00	5600	1,82
BN19-510	*	19	19	17,52 ...17,59	17,70 ... 17,77	10,00	2800	0,87
BN19-519		19	19	17,52 ...17,59	17,70 ... 17,77	19,00	4900	1,66
BN19-522		19	19	17,52 ...17,59	17,70 ... 17,77	22,00	6000	1,93
BN20-506	*	20	20	18,02 ...18,11	18,25 ... 18,33	7,00	1600	0,81
BN20-507		20	20	18,02 ...18,11	18,25 ... 18,33	8,00	1800	1,04
BN20-508		20	20	18,02 ...18,11	18,25 ... 18,33	9,00	2200	1,08
BN20-510	*	20	20	18,02 ...18,11	18,25 ... 18,33	12,00	2900	1,36
BN20-512	*	20	20	18,02 ...18,11	18,25 ... 18,33	15,00	3750	1,63
BN20-514	*	20	20	18,02 ...18,11	18,25 ... 18,33	18,00	4600	1,90
BN20-515		20	20	18,02 ...18,11	18,25 ... 18,33	19,00	5200	2,04
BN20-518	*	20	20	18,02 ...18,11	18,25 ... 18,33	23,00	5900	2,45
BN20-520	*	20	20	18,02 ...18,11	18,25 ... 18,33	25,00	6850	2,72
BN20-522	*	20	20	18,02 ...18,11	18,25 ... 18,33	28,00	7700	2,99
BN22-512	*	22	22	20,02 ...20,11	20,25 ... 20,33	18,00	4450	1,81
BN22-515	*	22	22	20,02 ...20,11	20,25 ... 20,33	26,00	5550	2,26

* auch in Kohlenstoffstahl serienmäßig lieferbar

+ auch in Nirostahl serienmäßig lieferbar